

LOC/DME I-HCE 110.5 Chan 42	APP CRS 355°	Rwy Ldg 9000 TDZE 480 Apt Elev 542	ILS or LOC RWY 36R AUSTIN-BERGSTROM INTL (AUS)
---	------------------------	---	---



DME required. RADAR required for procedure entry.

Simultaneous approach authorized.
For inop ALS, increase S-ILS 36R Cat E visibility to RVR 4000,
S-LOC 36R Cat C/D/E visibility to 1¾ SM.

MALSR
AS

MISSED APPROACH: Climb to 1000 then
climbing right turn to 3000 on heading 030°
and CWK VORTAC R-088 to HOOKK/CWK
17 DME and hold.

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6
------------------------	---	------------------------------------	-------------------------------

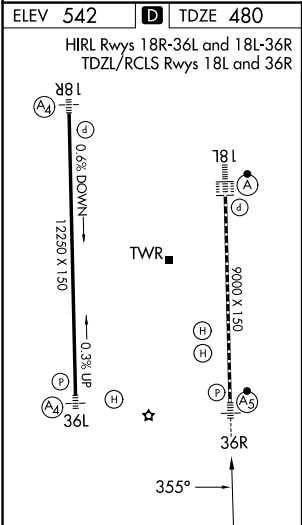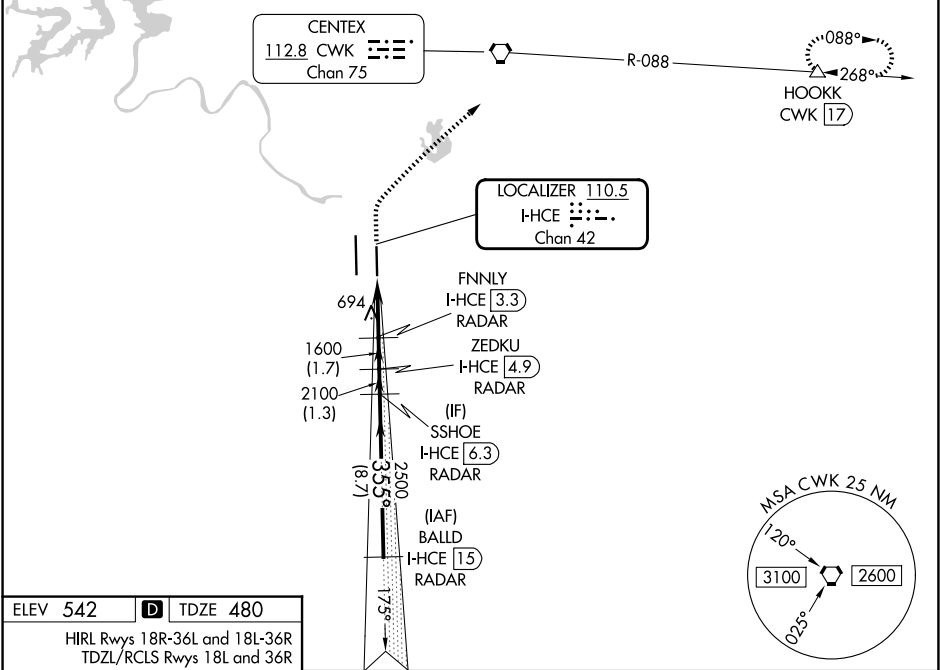

1000	3000	CWK R-088	HOOKK	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 59).	
1000	3000	CWK R-088	HOOKK	SSXOE I-HCE [6.3] RADAR	BALLD I-HCE [15] RADAR
I-HCE [0.1] DME ANTENNA	I-HCE [1.4]	FNNLY I-HCE [3.3] RADAR	ZEDKU I-HCE [4.9] RADAR	SSXOE I-HCE [6.3] RADAR	BALLD I-HCE [15] RADAR
1600	1600	1600	2100	2500	4000
1.5 NM	1.9 NM	1.7 NM	1.3 NM	8.7 NM	
CATEGORY	A	B	C	D	E
S-ILS 36R	680/18 200 (200-½)				
S-LOC 36R	1000/24	520 (500-½)	1000/55	520 (500-1)	
CIRCLING	1040-1 498 (500-1)	1120-1 578 (600-1)	1200-1¾ 658 (700-1¾)	1200-2 658 (700-2)	NA