

APP CRS
281°

Rwy Ldg
TDZE
1125

Apt Elev
1203

RNAV (RNP) Z RWY 28L
PITTSBURGH INTL (PIT')

RNP AR APCH - GPS.


▼

For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.13 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4000 on track 281° to CAKAT and track 256° to ELALE and track 223° to BOPGE and track 210° to HLG VOR/DME and hold.

D-ATIS 127.25	PITTSBURGH APP CON 123.95 360.8	PITTSBURGH TOWER 128.3 291.7	GND CON SOUTH 121.9 348.6 NORTH 127.8 348.6
------------------	------------------------------------	---------------------------------	---

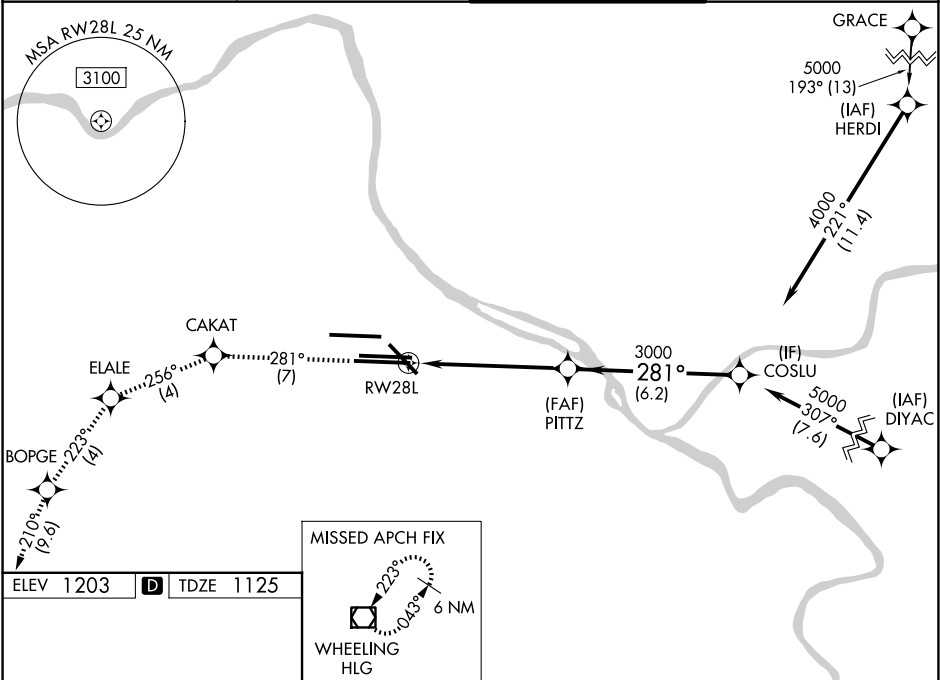

REIL Rwy 10C HIRL all rwys TDZL/RCLS Rwys 10L, 10R, 28L, 28R, 28C, and 32	4000	↑	tr 281°	CAKAT	tr 256°	ELALE	tr 223°	BOPGE	tr 210°	HLG	COSLU
	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).										
	PITZ 3000 3000 281° 4000 GP 3.00° TCH 54										
	CATEGORY		A		B		C		D		
	RNP 0.13 DA		1529/40		404 (400-¾)						
RNP 0.30 DA		1579/45		454 (400-¾)							
AUTHORIZATION REQUIRED											