



WAAS CH 49010 W23A	APP CRS 233°	Rwy Ldg TDZE 661 Apt Elev 668	8002 661 668
--	------------------------	---	---

RNAV (GPS) RWY 23

MBS INTL (MBS)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. # RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 	MISSED APPROACH: Climb to 2300 direct WERDO and hold.	
ATIS 125.925	GREAT LAKES APP CON★ 126.45 235.625	SAGINAW TOWER★ 120.1 (CTAF) 0 257.7	GND CON 121.7	UNICOM 122.95

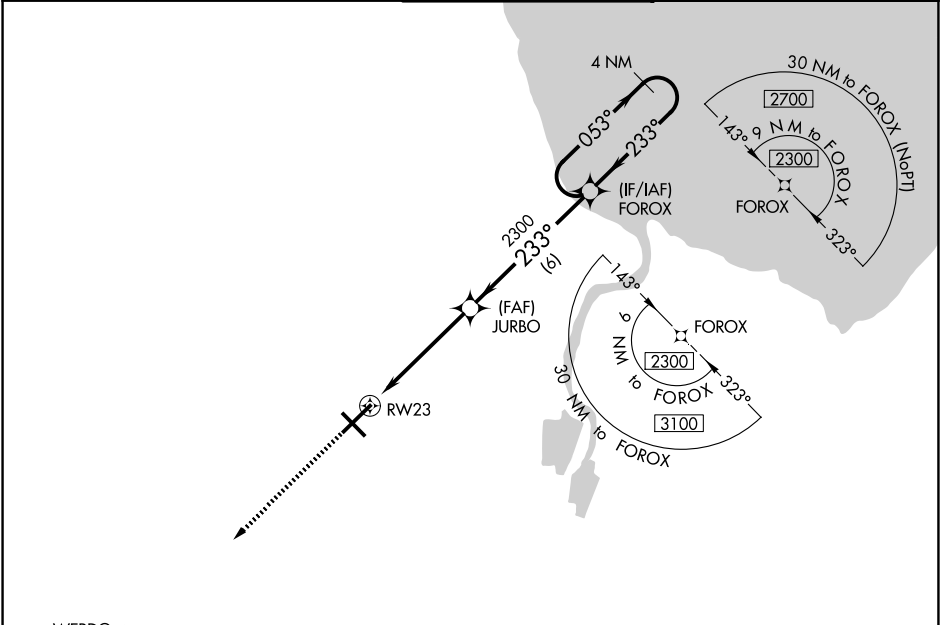

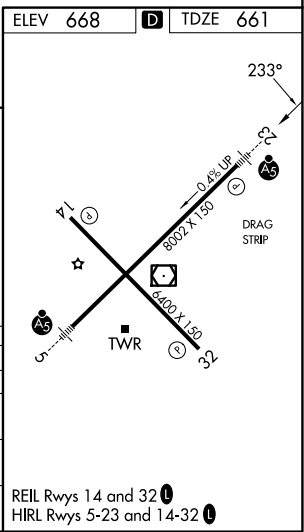ELEV 668 D TDZE 661					
*LNAV only		*1.1 NM to RWY 23			
RWY 23		GP 3.00° TCH 54			
CATEGORY		A	B	C	D
LPV DA #		861/24		200 (200-½)	
LNAV/VNAV DA		940/24		279 (300-½)	
LNAV MDA		1060/24 399 (400-½)		1060/35 399 (400-¾)	
CIRCLING		1080-1 412 (500-1)		1240-1½ 572 (600-1½)	
		452 (500-1)		1240-2 572 (600-2)	