

LOC/DME I-CJN

110.75

Chan **44** (Y)

APP CRS

186°

Rwy Ldg

8000

TDZE

868

Apt Elev

896

ILS or LOC RWY 18R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From BYRAN, CRSLY, GOSEC, FIBMO, LEWIN and NXHAL.

DME or RADAR required. RADAR required for procedure entry at WALBY.

For inop ALS, increase S-LOC 18R Cats C and D visibility to 1 3/8 SM. Simultaneous approach authorized with Rwy 18L/C. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 on heading 270° and FLM VOR/DME R-314 to JADRO/FLM 43.3 DME/RADAR and hold.

D-ATIS

134.375

CINCINNATI APP CON

119.7 363.15 (090°-269°)

123.875 363.15 (270°-089°)

CINCINNATI TOWER


118.975 360.85 (18L/36R)

118.3 (9/27, 18C/36C)

133.325 (18R/36L)

GND CON

121.7

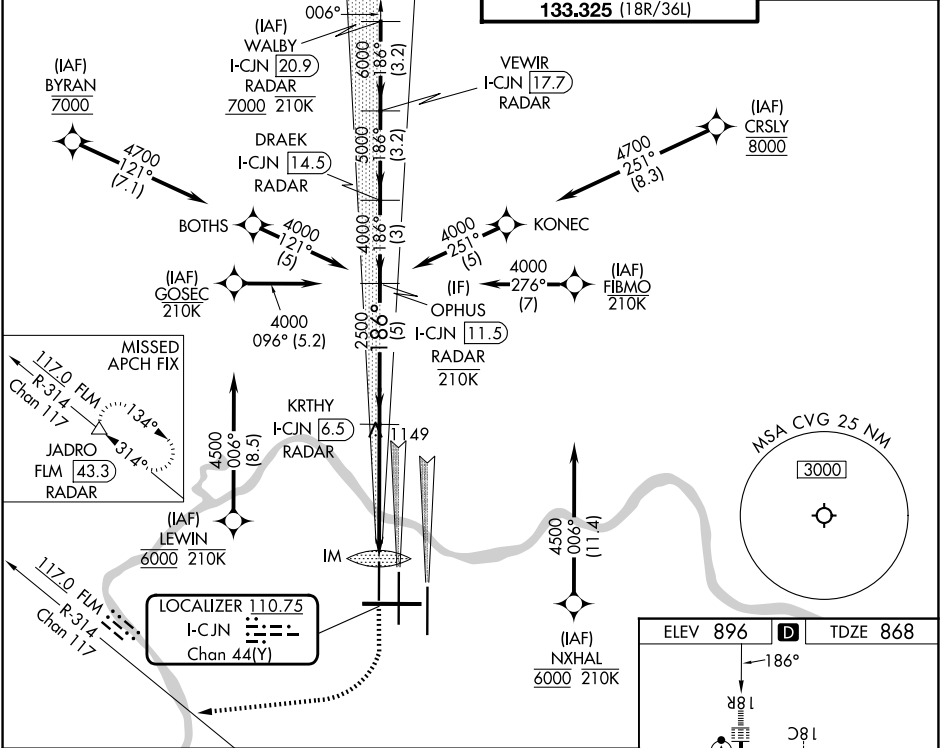

CATEGORY	S-ILS 18R			
	1068/18 200 (200-1/2)			
	S-LOC 18R			
	1360/24 492 (500-1/2)			
	1360/50 492 (500-1)			
CIRCLING	1460-1 564 (600-1)			
	1560-1 3/4 664 (700-1 3/4)			
CIRCLING	1560-2 664 (700-2)			
	1560-2 664 (700-2)			

