

APP CRS
186°

Rwy Ldg
TDZE **889**
Apt Elev **896**

RNAV (RNP) Z RWY 18L

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP AR APCH - GPS. Authorization required. From NABRS or OCONO: RF.

MALSR

MISSED APPROACH: Climb to 3000 direct LAPR and on track 136° to FLM VOR/DME and hold.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALS, increase RNP 0.25 all Cats visibility to 5500 and increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

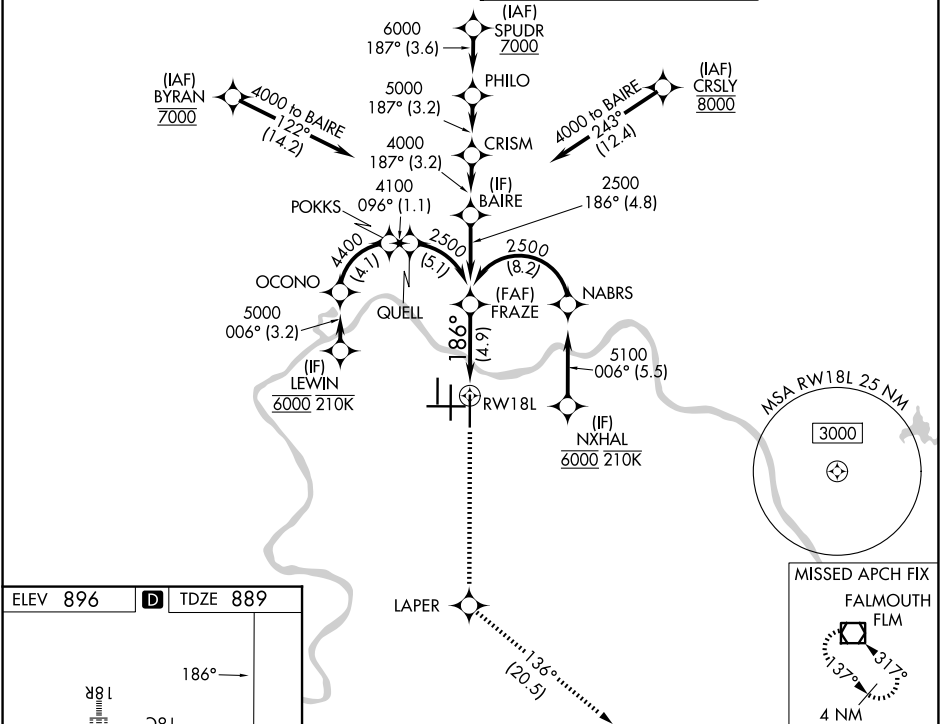

ELEV 896

D

TDZE 889

3000

LAPR

tr 136°

FLM

See planview for multiple IF locations.

RW18L

2500

2500

186°

4.9 NM

GP 3.00°

TCH 55

CATEGORY	A	B	C	D
RNP 0.25 DA		1240/30	351 (400-½%)	
RNP 0.30 DA		1388/50	499 (500-1)	

AUTHORIZATION REQUIRED