


WAAS CH 86299 W25A	APP CRS 256°	Rwy Ldg TDZE Apt Elev	5500 44 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 25

OXNARD (OXR)

RNP APCH - GPS.		MALSF	MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold.
⚠ Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.		🚶	

ATIS 118.05	POINT MUGU APP CON★ 124.7 335.5	OXNARD TOWER★ 134.95 (CTAF) 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

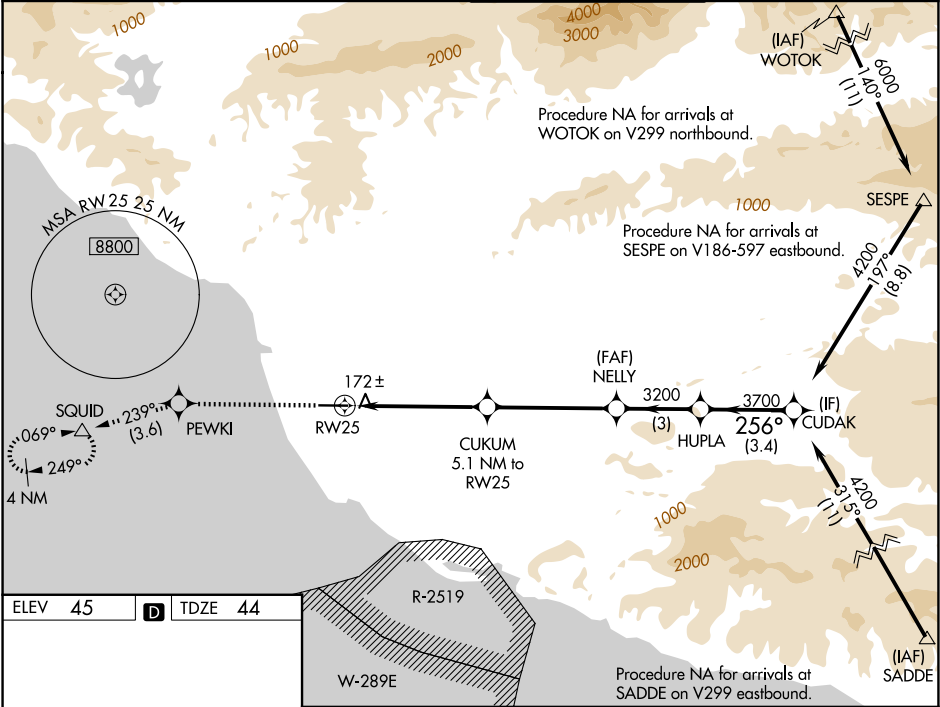

2000		PEWKI	tr 239°	SQUID	HUPLA		CUDAK
↑		✧		△	NELLY		
1.3 NM to RW25		CUKUM 5.1 NM to RW25		3200	256°		4200
RW25		1720		3200	3700		GP 3.00° TCH 58
1.3 NM		3.8 NM		4.6 NM		3 NM	
3.4 NM		CATEGORY		A	B	C	D
LPV DA		424-1		380 (400-1)			
LNAV/VNAV DA		421-1		377 (400-1)			
LNAV MDA		520-1		476 (500-1)		520-1⅓ 476 (500-1⅓)	
CIRCLING		520-1		475 (500-1)		700-1¾ 655 (700-1¾) 760-2¼ 715 (800-2¼)	