

WAAS CH 69612 W14A	APP CRS 146°	Rwy Ldg TDZE Apt Elev	6157 77 80
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 14

REPUBLIC (F'RG)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.


▲

Baro-VNAV and VDP NA when using ISP altimeter setting. When local altimeter setting not received, use ISP altimeter setting and increase LPV DA to 374 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 442 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MALSF

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 direct DPK VOR/DME and hold, continue climb-in-hold to 3000.

ATIS 126.65	NEW YORK APP CON 128.125 269.0	REPUBLIC TOWER ★ 118.8 (CTAF) 0 279.65	GND CON 121.6 269.6	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

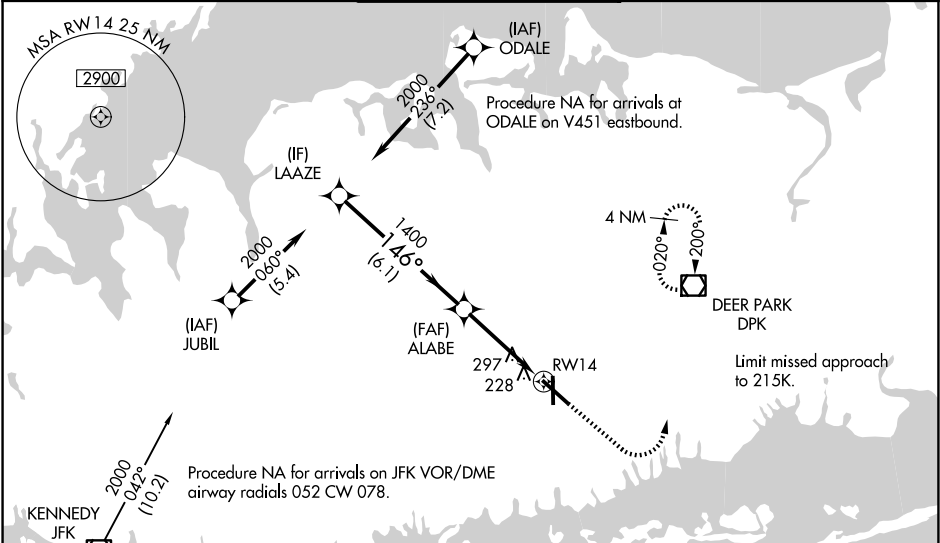

ELEV 80		D TDZE 77	
GP 3.00° TCH 60 1800 3000 DPK LAAZE 2000 146° 1400 ALABE 1400 1.4 NM to RWY 14 RWY 14 6.1 NM 2.6 NM 1.4 NM			
CATEGORY	A	B	C
LPV DA	337-3/4 260 (300-3/4)		
LNAV/VNAV DA	405-1 328 (400-1)		
LNAV MDA	560-3/4 483 (500-3/4) 560-1 483 (500-1)		
CIRCLING	640-1 720-1 860-2 1/4 1000-3 560 (600-1) 640 (700-1) 780 (800-2 1/4) 920 (1000-3)		

146°

61

5517 X 150

5832 X 150

0.38 UP

TWR

REIL Rwy 1, 19, and 32

MIRL Rwy 1-19

HIRL Rwy 14-32