


WAAS CH 57933 W17A	APP CRS 174°	Rwy Ldg TDZE Apt Elev	6502 867 874
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

KALAMAZOO/BATTLE CREEK INTL (AZO)

RNP APCH - GPS		MISSED APPROACH: Climb to 2800 direct COVAV and hold.	
Baro-VNAV NA when using BTL altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Circling Rwy 5, 9, 23, 27 NA at night. When local altimeter setting not received, use BTL altimeter setting: increase LPV DA to 1198 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1298 feet and all visibilities ½ SM; increase all MDAs 60 feet and Circling visibility Cat C/D ¼ SM.			
ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9
		UNICOM 122.95	

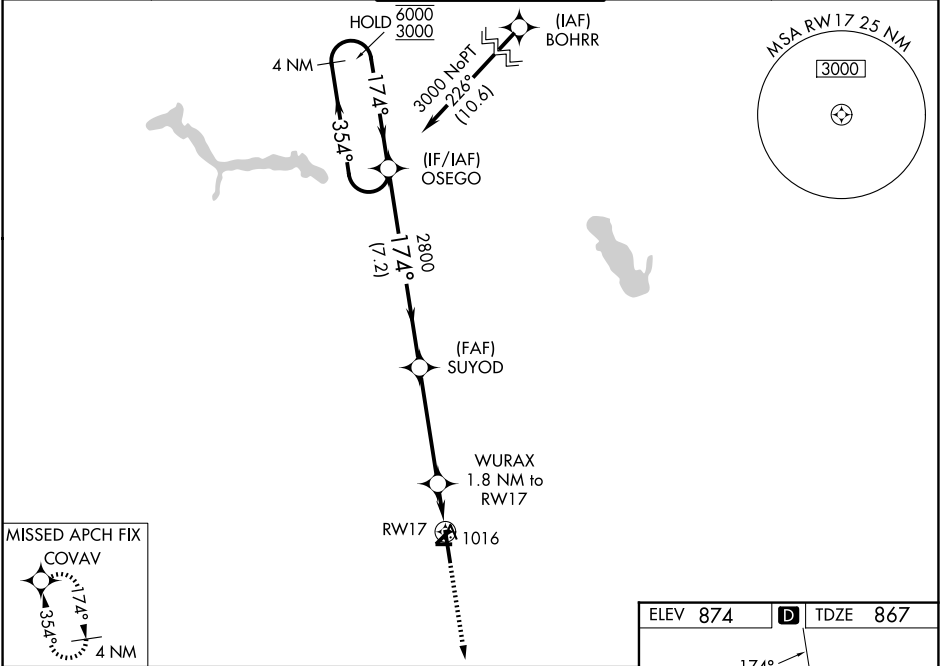

4 NM Holding Pattern		OSEGO		2800 COVAV	
6000 3000		← 354° 174° →		174°	
GP 3.00° TCH 45		2800		WURAX 1.8 NM to RW17	
		7.2 NM		4.2 NM	
		1460		1.8	
CATEGORY	A	B	C	D	
LPV DA	1156-7/8		289 (300-7/8)		
LNAV/VNAV DA	1256-1 1/8		389 (400-1 1/8)		
LNAV MDA	1320-1	453 (500-1)	1320-1 3/8	453 (500-1 3/8)	
CIRCLING	1340-1	466 (500-1)	1560-2 686 (700-2)	1560-2 1/4 686 (700-2 1/4)	

