

WAAS CH 45548	APP CRS 247°	Rwy Ldg TDZE 682 Apt Elev 690
-------------------------	------------------------	---


RNAV (GPS) RWY 25
ALPENA COUNTY RGNL (APN)

RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 25 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using PZQ altimeter setting. When local altimeter setting not received, use PZQ altimeter setting and increase LPV DA to 1018 feet; increase LNAV/VNAV DA to 1115 feet and all visibilities 1/4 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
GRYDR and hold.

ATIS ★ 120.675 327.05	ALPENA APP CON ★ 128.425 379.3	ALPENA TOWER ★ 121.35 (CTAF) 0 318.1	GND CON 121.9 275.8	UNICOM 122.95
---------------------------------	--	--	-------------------------------	-------------------------

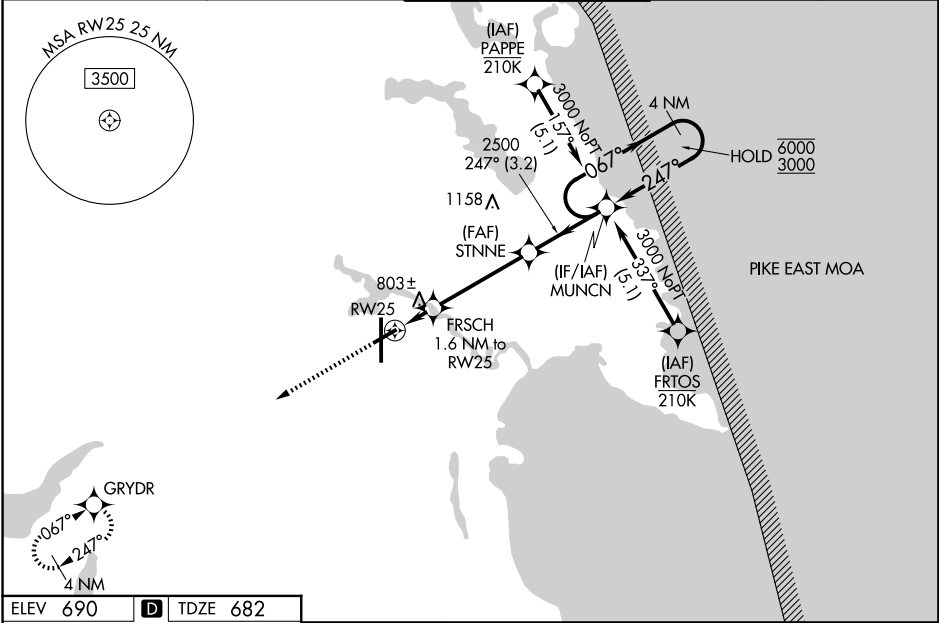

ELEV 690 **D** TDZE 682

3000 GRYDR

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 48).

MUNCN 4 NM Holding Pattern

FRSCH 1.6 NM to RW25

STNNE 2500

1240 2500

GP 3.00° TCH 56

1 NM to RW25

1 NM - 0.5 NM - 4 NM - 3.2 NM

CATEGORY	A	B	C	D
LPV DA		963-1	281 (300-1)	
LNAV/VNAV DA		1060-1	378 (400-1)	
LNAV MDA		1060-1	378 (400-1)	
CIRCLING	1140-1	450 (500-1)	1220-1½ 530 (600-1½)	1300-2 610 (700-2)

61

247°

TWR

5028 X 100

9001 X 150

45

HIRL Rwy 1-19 **0**

MIRL Rwy 7-25 **0**

REIL Rwy 7, 19 and 25 **0**

EC-1, 09 JUL 2026 to 06 AUG 2026

EC-1, 09 JUL 2026 to 06 AUG 2026