


WAAS CH 82200 W18A	APP CRS 185°	Rwy Ldg TDZE 592 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 18
PRYOR FLD RGNL (DCU)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huntsville Intl-Carl T Jones Fld altimeter setting: increase LPV DA to 817 and LNAV/VNAV DA to 920 and all visibilities ½ mile. Increase all MDA 40 feet and LNAV Cat C and D visibility ⅓ mile. VDP and Baro-VNAV NA when using Huntsville Intl-Carl T Jones Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3000 direct
ATHEN and hold.

ASOS 118.375	HUNTSVILLE APP CON* 118.05 239.0	UNICOM 123.075 (CTAF) 1
------------------------	--	-----------------------------------

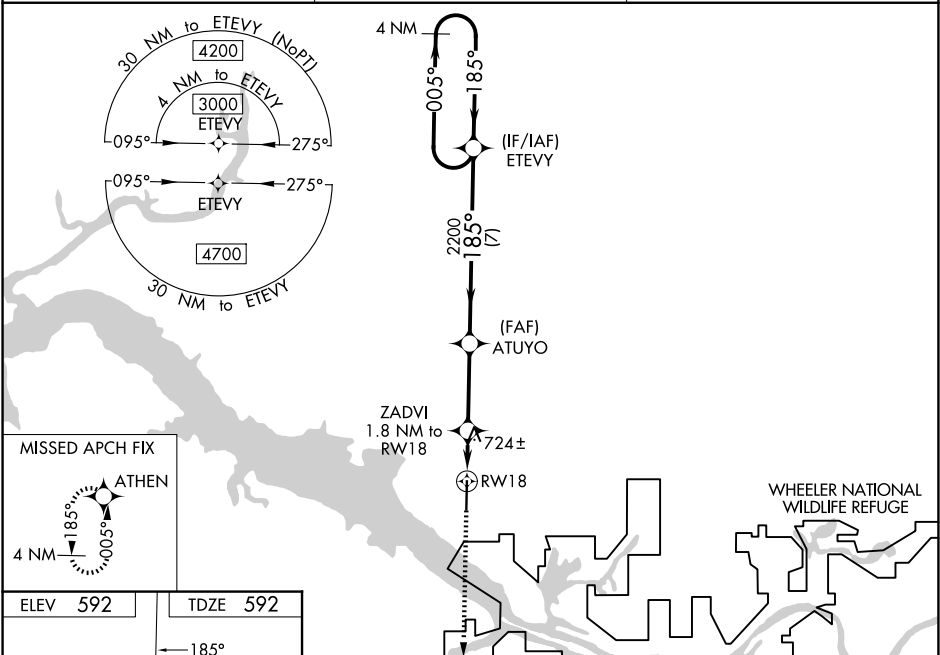

ELEV 592 TDZE 592

185°

81

6107 X 100

36

3000 ATHEN

*LNAV only

RW18

ZADVI 1.8 NM to RW18

ATUYO 2200

ETE VY 4 NM Holding Pattern

GP 3.00° TCH 47

1180 2200

1.1 NM 0.7 3.1 NM 7 NM

CATEGORY	A	B	C	D
LPV DA	792-¾		200 (200-¾)	
LNAV/VNAV DA	895-1		303 (400-1)	
LNAV MDA	980-1 388 (400-1)		980-1⅛ 388 (400-1⅛)	
CIRCLING	1040-1 448 (500-1)	1060-1 468 (500-1)	1340-2¼ 748 (800-2¼)	1340-2½ 748 (800-2½)

SE-4, 09 JUL 2026 to 06 AUG 2026

SE-4, 09 JUL 2026 to 06 AUG 2026