

LOC/DME I-HUM

110.5

Chan 42

APP CRS

042°

Rwy Ldg

8950

TDZE

8

Apt Elev

13

ILS Z RWY 4R


DANIEL K INOUEY INTL (HNL) (PHNL)

From HAURY: RNAV 1-GPS required. DME or RADAR required. DME or RADAR required for procedure entry.

MALS

MISSED APPROACH: Climb to 540, Cat E climb to 780 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL VORTAC 13.9 DME and hold. \* Missed approach requires minimum climb of 318 feet per NM to 1820, (if unable to meet climb gradient use S-ILS 4R minimums).

|              |              |                                       |             |
|--------------|--------------|---------------------------------------|-------------|
| D-ATIS       | HCF APPROACH | HONOLULU TOWER                        | GND CON     |
| 127.9 251.15 | 118.3 269.0  | 118.1 257.8<br>123.9 273.575 (8R/26L) | 121.9 348.6 |

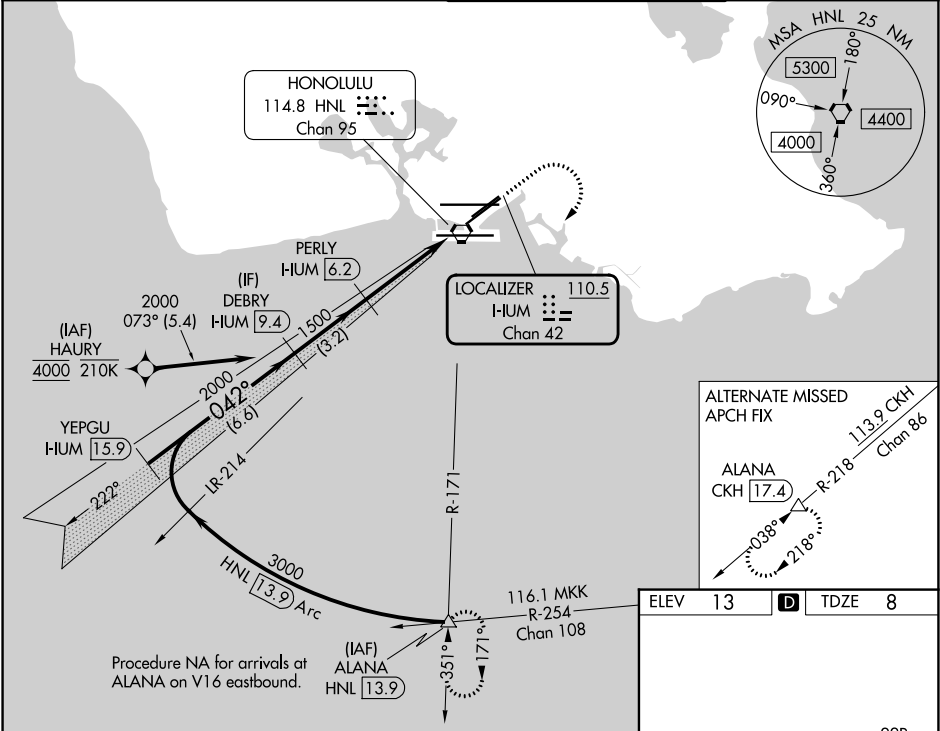

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

YEPGU H-IUM 15.9

DEBRY H-IUM 9.4

PERLY H-IUM 6.2

HNL R-171

ALANA

3000

2000

1500

540

3000

hdg 220°

GS 3.00°

TCH 55

6.6 NM

3.2 NM

4.5 NM

| CATEGORY  | A | B     | C           | D | E                      |
|-----------|---|-------|-------------|---|------------------------|
| S-ILS 4R* |   | 258-½ | 250 (300-½) |   | NA                     |
| S-ILS 4R  |   | 308-½ | 299 (300-½) |   | 566-1⅞<br>557 (600-1⅞) |

MIRL Rwy 4L-22R

REIL Rwy 4L, 8R, 22L, 22R, and 26R

HIRL Rwy 4R-22L, 8L-26R, and 8R-26L