

NOTE: Departures from Runways 4L/R and 8L/R must complete right turn to assigned heading within 2 NM of runway departure end. Cross CKH R-240 at or above 2500.

NOTE: Departures Runways 26L/R must complete left turn to assign heading within 2 NM of runway departure end (HNL 3 DME).

### HCF APPROACH

124.8 317.6

## D-ATIS

127.9 251.15

CLNC DEL

121.4 281.4

GND CON


121.9 348.6

## OLULU TOWER

## HONOLULU TOWER

118.1 257.8

123.9 273.575 (Rwy 8R/26L)

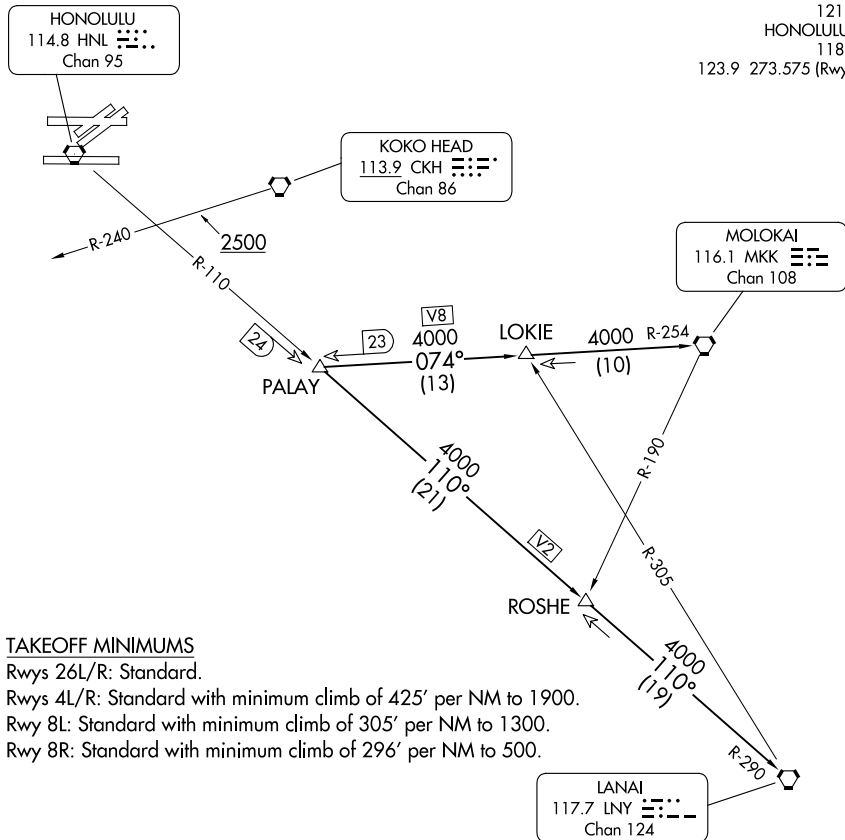

## TAKEOFF MINIMUMS

Rwys 26L/R: Standard.

Rwys 4L/R: Standard with minimum climb of 425' per NM to 1900.

Rwy 8L: Standard with minimum climb of 305' per NM to 1300.

Rwy 8R: Standard with minimum climb of 296' per NM to 500.

NOTE: Chart not to scale.

## DEPARTURE ROUTE DESCRIPTION

Turn right/left to heading assigned by Tower, expect vectors to PALAY, maintain 5000; then on (transition). Expect clearance to enroute altitude/flight level at LNY VORTAC.

LANAI TRANSITION (PALAY3.LNY): From over PALAY INT on HNL R-110 and LNY R-290 to LNY VORTAC.

MOLOKAI TRANSITION (PALAY3.MKK): From over PALAY INT on MKK R-254 to MKK VORTAC.