

WAAS CH 61100 W13A	APP CRS 131°	Rwy Ldg 9200 TDZE 358 Apt Elev 366
--	------------------------	---

RNAV (GPS) RWY 13
EAST TEXAS RGNL (GGG)


RNP APCH-GPS.

⚠ Baro-VNAV and VDP NA when using Gilmer altimeter setting. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat E visibility to 1 1/4 SM. When local altimeter setting not received use Gilmer altimeter setting and increase LPV DA to 671 feet; increase LNAV/VNAV DA to 785 feet; increase all MDA 60 feet, and LNAV visibility Cat C to RVR 5000, and Circling visibility Cats C/D/E 1/4 SM. For inop ALS when using Gilmer altimeter setting, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV Cat E visibility to 1 1/4 SM, and LNAV Cats C/D/E visibility to 1 3/8 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.




MISSED APPROACH:
Climb to 3000 direct
FANAL and hold.

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2 (CTAF) 1377.05	GND CON 121.6	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

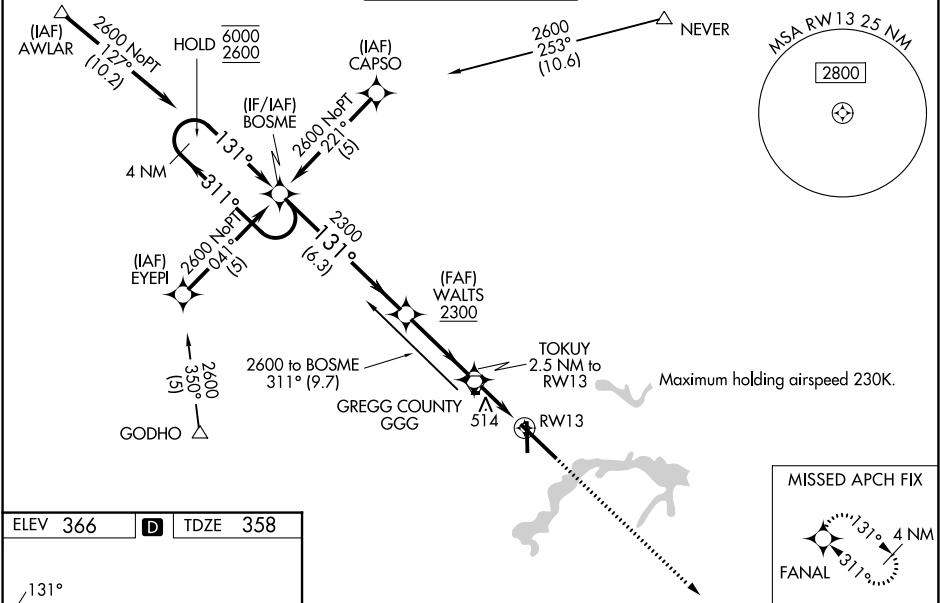

ELEV 366	D	TDZE 358
-----------------	----------	-----------------

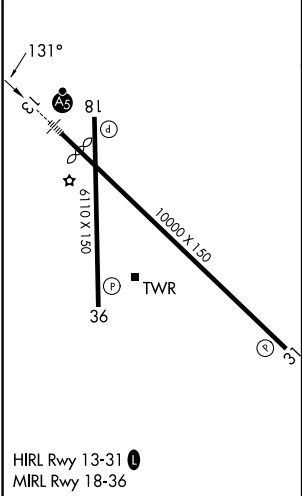

4 NM Holding Pattern					BOSME		3000 ↑		FANAL ✦		
6000 2600		← 311° → 131°		131°		WALTS 2300		TOKUY 2.5 NM to RW13		1.2 NM to RW13	
GP 3.00° TCH 42				2300		1200		RW13			
		6.3 NM		3.4 NM		1.3		1.2 NM			
CATEGORY		A		B		C		D		E	
LPV DA		612/24 254 (300-½)									
LNAV/VNAV DA		726/40 368 (400-¾)									
LNAV MDA		780/24 422 (500-½)		780/40 422 (500-¾)		780/50		422 (500-1)			
CIRCLING		860-1 494 (500-1)		980-1¾ 614 (700-1¾)		1080-2¼ 714 (800-2¼)		1080-2½ 714 (800-2½)			