
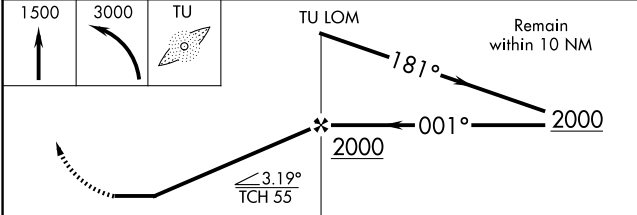


LOM TU	APP CRS	Rwy Ldg	7150
420	001°	TDZE	347
		Apt Elev	347

NDB RWY 36
TUPELO RGNL (TUP)

▼ ▲ NA	When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility 3⁄8 SM and Circling Cats C and D 1⁄2 SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 3⁄8 SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 3⁄4 SM.	MALSR AS	MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct TU LOM and hold.
----------------------	--	------------------------	---

ASOS	MEMPHIS CENTER	TUPELO TOWER ★	GND CON
133.525	128.5 279.55	118.775 (CTAF) 254.275	121.825 254.275

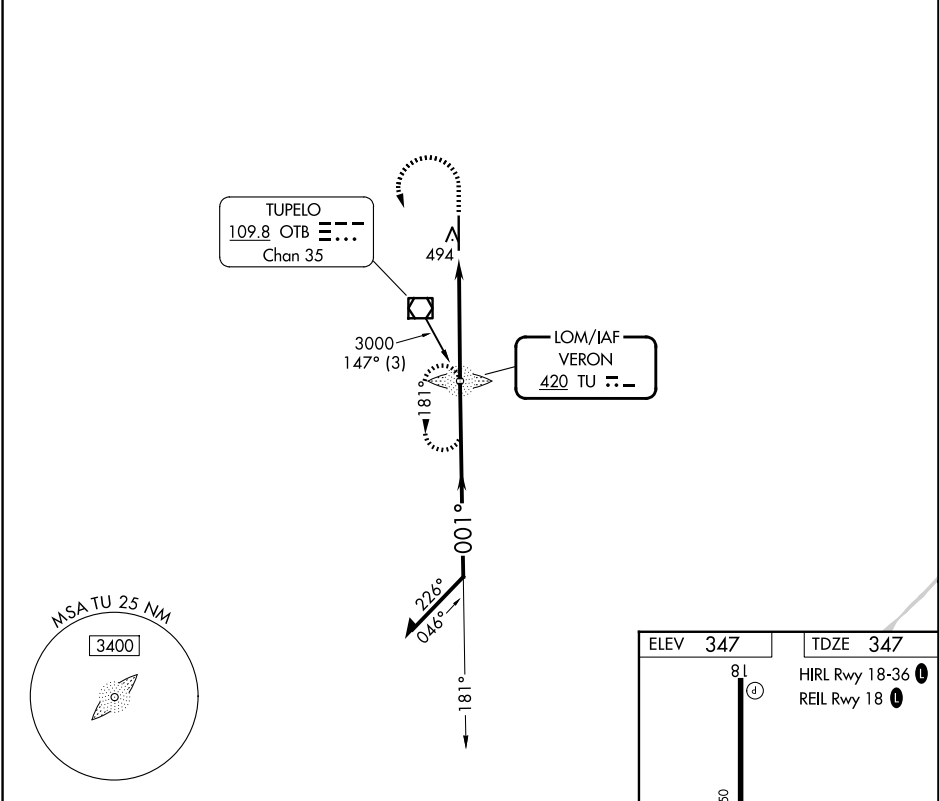

CATEGORY		A	B	C	D	001°
S- 36	840-3⁄4 493 (500-3⁄4)		840-1 493 (500-1)			
FAF to MAP 4.7 NM						
CIRCLING	840-1 493 (500-1)		900-1½ 553 (600-1½)	1140-2½ 793 (800-2½)		
				Knots	60 90 120 150 180	
				Min:Sec	4:42 3:08 2:21 1:53 1:34	