

WAAS CH 50503 W22A	APP CRS 216°	Rwy Ldg 7659 TDZE 37 Apt Elev 41
--	------------------------	---

RNAV (GPS) RWY 22L

LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using **ARA** altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Rwy 22L helicopter visibility reduction below RVR 4000 NA. Circling Rwy 4L, 4R, 22R, and 11 NA at night. Inop table does not apply to LPV all Cats. When local altimeter setting not received, use **ARA** altimeter setting and increase LPV DA to 316 feet, increase LNAV/VNAV DA to 377 feet, increase all MDAs 40 feet and LNAV visibility Cat C/D to RVR 5000 and Circling visibility Cat C/D ¼ SM. For inop ALS increase LNAV/VNAV all Cat visibility to RVR 4500 and increase LNAV Cats A and B visibility to RVR 5500.

MALSR
A5

MISSED APPROACH:
Climb to 2000 direct
AYOTY and hold.

ATIS 134.05	LAFAYETTE APP CON★ 121.1 363.0	LAFAYETTE TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------	------------------

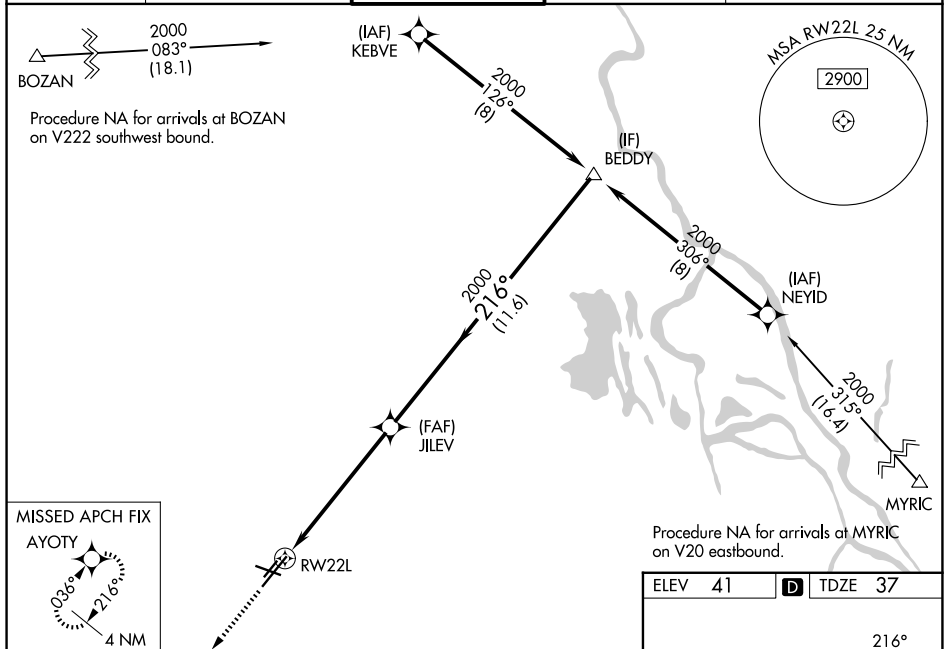

CATEGORY	A	B	C	D
LPV DA	287/40		250 (300-¾)	
INAV/ VNAV	348/40		311 (400-¾)	
LNAV MDA	480/40 443 (500-¾)		480/45 443 (500-¾)	
CIRCLING	540-1 499 (500-1)	580-1 539 (600-1)	700-1¾ 659 (700-1¾)	700-2 659 (700-2)

