
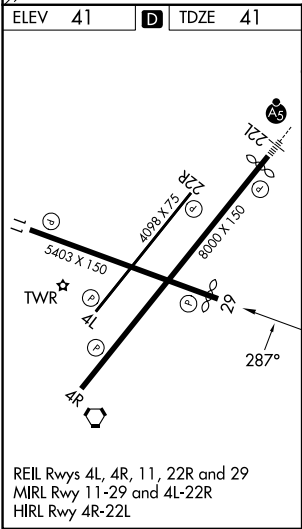


WAAS CH 45703 W29A	APP CRS 287°	Rwy Ldg 5155 TDZE 41 Apt Elev 41
--	------------------------	---

RNAV (GPS) RWY 29

LAFAYETTE RGNL/PAUL FOURNET FLD (L.F'T')

RNP APCH - GPS.				MISSED APPROACH: Climb to 2800 direct SUVDE and on track 273° to RAYNE and hold.
Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling Rwy 11, 4R, 4L, and 22R NA at night. Baro-VNAV and VDP NA when using ARA altimeter setting. When local altimeter setting not received, use ARA altimeter setting and increase LPV DA to 320 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 320 feet and visibilities ½ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.				
ATIS 134.05	LAFAYETTE APP CON★ 121.1 363.0	LAFAYETTE TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.8	
UNICOM 122.95				

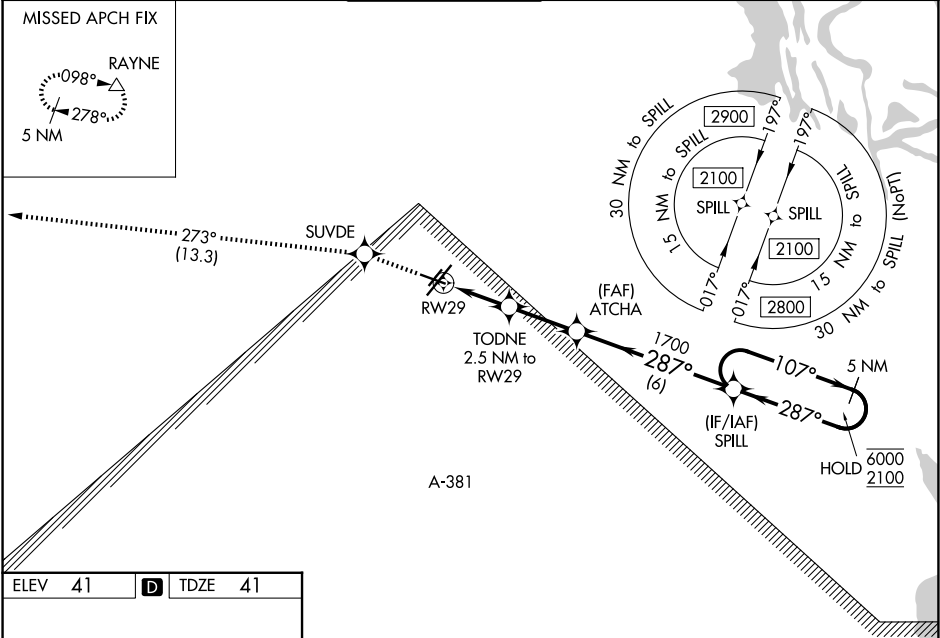

2800	SUVDE	tr 273°	RAYNE	5 NM Holding Pattern			
		TODNE 2.5 NM to RW29	ATCHA 1700	GP 3.00° TCH 51			
		1 NM to RW29	880				
		1700	287°				
		107°	6000				
		287°	2100				
		1 NM	1.5 NM	2.6 NM	6 NM		
CATEGORY	A		B	C	D		
LPV DA	291-¾		250 (300-¾)				
LNAV/VNAV DA	291-¾		250 (300-¾)				
LNAV MDA	400-1		359 (400-1)				
CIRCLING	500-1 459 (500-1)	580-1 539 (600-1)	700-1¾ 659 (700-1¾)	700-2 659 (700-2)			

SC-4, 09 JUL 2026 to 06 AUG 2026

SC-4, 09 JUL 2026 to 06 AUG 2026