


LOC/DME I-NQA	APP CRS	Rwy Ldg	8001
109.75	219°	TDZE	322
Chan 34 (Y)		Apt Elev	322


ILS or LOC RWY 22
MILLINGTON/MEMPHIS (NQA)

RADAR required for procedure entry. DME required.		MALSR	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 and on MEM VORTAC R-002 to OZSOM/MEM 23.8 DME and hold, continue climb-in-hold to 3000.
	S-ILS 22 procedure NA when control tower closed if ceiling/visibility lower than 800/2. For inop ALS, increase S-ILS 22 Cat E visibility to ¾ SM and S-LOC 22 Cat E visibility to 1 ½ SM.		

AWOS-3	MEMPHIS APP CON		MILLINGTON TOWER ★	GND CON	UNICOM
118.925	119.1	291.6	120.25 (CTAF) 0 340.2	121.375	122.95
	125.8	338.3	(176°-355°) (356°-175°)		

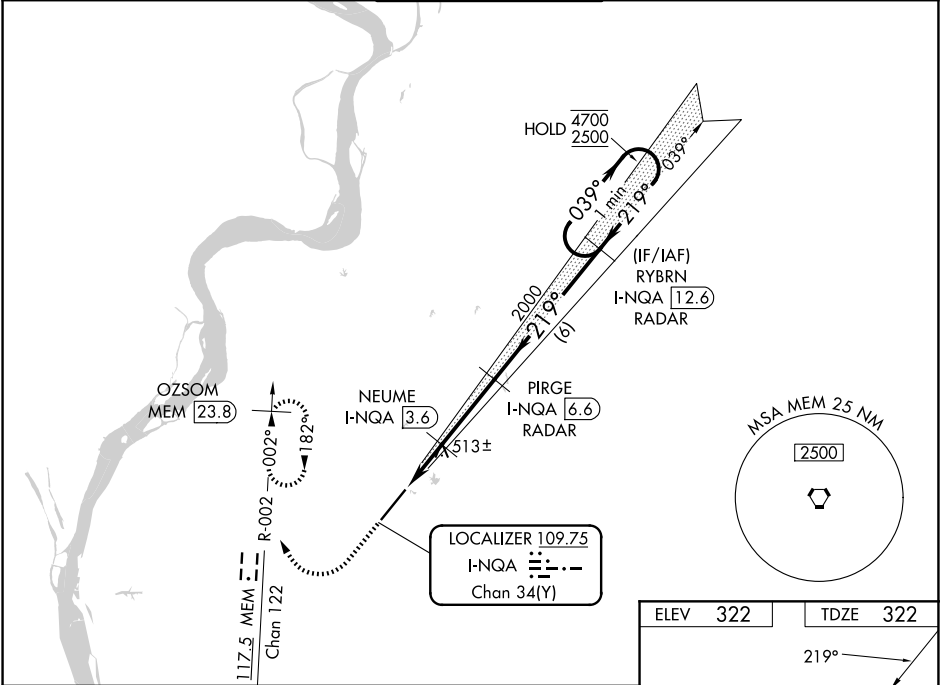

1000	3000	OZSOM MEM 23.8	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 67).	One Minute Holding Pattern
		MEM R-002		

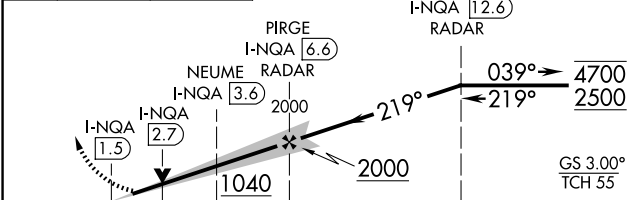

CATEGORY	A	B	C	D	E
S-ILS 22	522-1/2 200 (200-1/2)				
S-LOC 22	780-1/2	458 (500-1/2)	780-7/8	458 (500-7/8)	
CIRCLING	800-1	820-1	920-1 1/2	960-2	960-2 1/4
	478 (500-1)	498 (500-1)	598 (600-1 1/2)	638 (700-2)	638 (700-2 1/4)

