



ILS or LOC RWY 22
CHIPPEWA VALLEY RGNL (EAU)

MALSR
A5

MISSED APPROACH: Climb to 1600 then climbing right turn to 3500 on EAU VORTAC R-047 to IROKE/I-EAU LOC/DME 13.4 DME and hold.

▲ For inop ALS increase S-LCC 22 Cat C and D visibility to $\frac{7}{8}$ SM. For inop ALS when using Rice Lake altimeter setting, increase S-ILS 22 all Cats visibility to 1 SM. When local altimeter setting not received, use Rice Lake altimeter setting and increase DA 110 feet and all MDA 120 feet, increase S-LCC 22 Cat C and D and Circling Cat C visibility $\frac{1}{4}$ SM. VDP NA when using Rice Lake altimeter setting.

GND CON
120.925

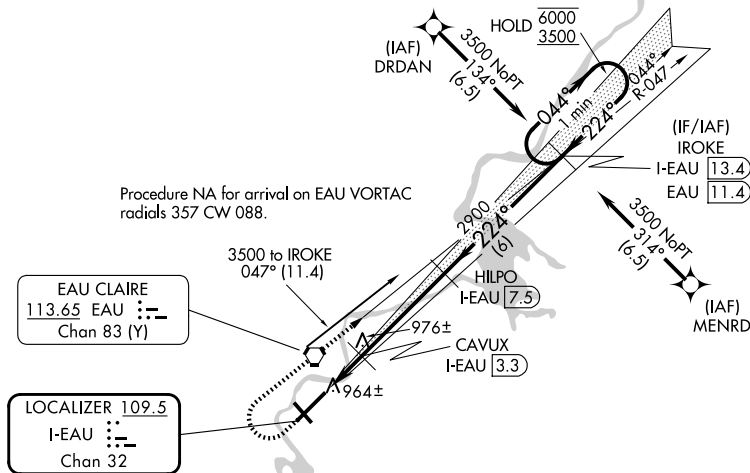

1600 ↑	3500 ↻ EAU R-047	IROKE I-EAU 13.4		Use I-EAU DME when on the localizer course.		One Minute Holding Pattern	
* LOC only							
CATEGORY	A		B		C		D
S-ILS 22			1113-1/2		200 (200-1/2)		
S-LOC 22			1220-1/2		307 (400-1/2)		
CIRCLING	1480-1 567 (600-1)		1540-1 627 (700-1)		1660-2/4 747 (800-2/4)		2200-3 1287 (1300-3)