



WAAS CH 69217 W04A	APP CRS 044°	Rwy Ldg TDZE Apt Elev	7701 889 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4
CHIPPEWA VALLEY RGNL (EAU)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Rice Lake Rgnl/Carl's Fld altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rice Lake Rgnl/Carl's Fld altimeter setting and increase LPV DA to 1199, LNAV/VNAV DA to 1489 and all visibilities ¾ SM. Increase all MDA 120 feet and LNAV Cat C/D and Circling Cat C visibility ¼ SM. Circling Rwy 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
IROKE and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925
------------------------	--	--	---------------------------

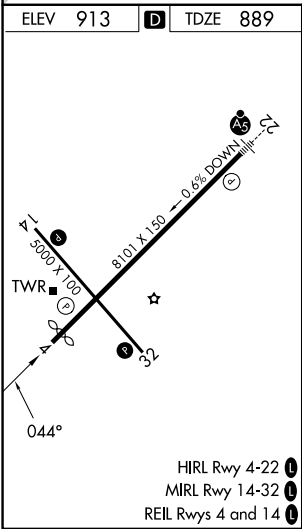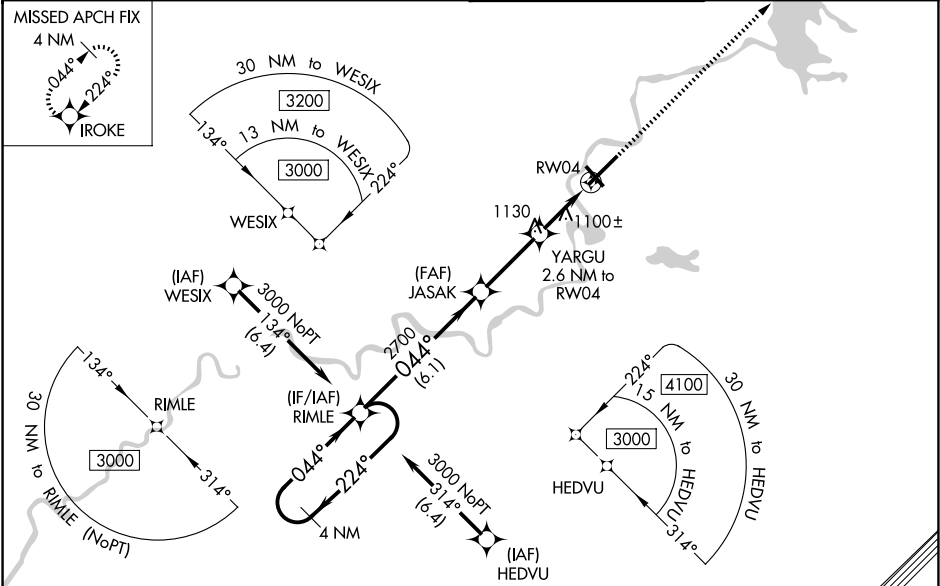

4 NM Holding Pattern					FALLS 1 MOA	
3000 ← 224° → 044° →					3000	IROKE
GP 3.00° TCH 44					* LNAV only	
RIMLE JASAK YARGU 2.6 NM to RW04					* 1.3 NM to RW04	
2700 *1740					RW04	
6.1 NM 3 NM 1.3 NM 1.3 NM						
CATEGORY	A	B	C	D		
LPV DA	1089-¾ 200 (200-¾)					
LNAV/VNAV DA	1379-1½ 490 (500-1½)					
LNAV MDA	1360-1	471 (500-1)	1360-1¾	471 (500-1¾)		
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)		

EC-3, 09 JUL 2026 to 06 AUG 2026

EC-3, 09 JUL 2026 to 06 AUG 2026