
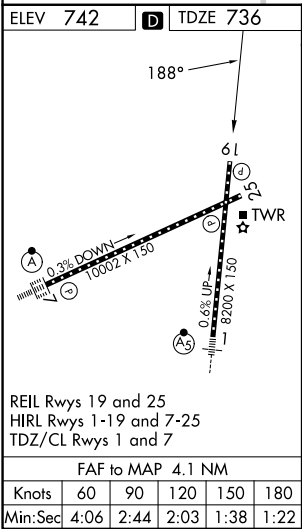


|                                                 |                        |                                                               |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|
| LOC/DME I-RFD<br><b>109.3</b><br>Chan <b>30</b> | APP CRS<br><b>188°</b> | Rwy Ldg <b>8099</b><br>TDZE <b>736</b><br>Apt Elev <b>742</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|

LOC BC RWY 19

CHICAGO/ROCKFORD INTL (RFD)

|                        |                                        |                                                                                                                                    |                                 |
|------------------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| DME or RADAR required. |                                        | MISSED APPROACH: Climb to 2500 on I-RFD localizer course S (188°) to GILMY 5.8 DME/RADAR and hold, continue climb-in-hold to 2500. |                                 |
| ATIS<br><b>127.6</b>   | ROCKFORD APP CON<br><b>121.0 327.0</b> | ROCKFORD TOWER<br><b>118.1 290.375</b>                                                                                             | GND CON<br><b>121.9 290.375</b> |

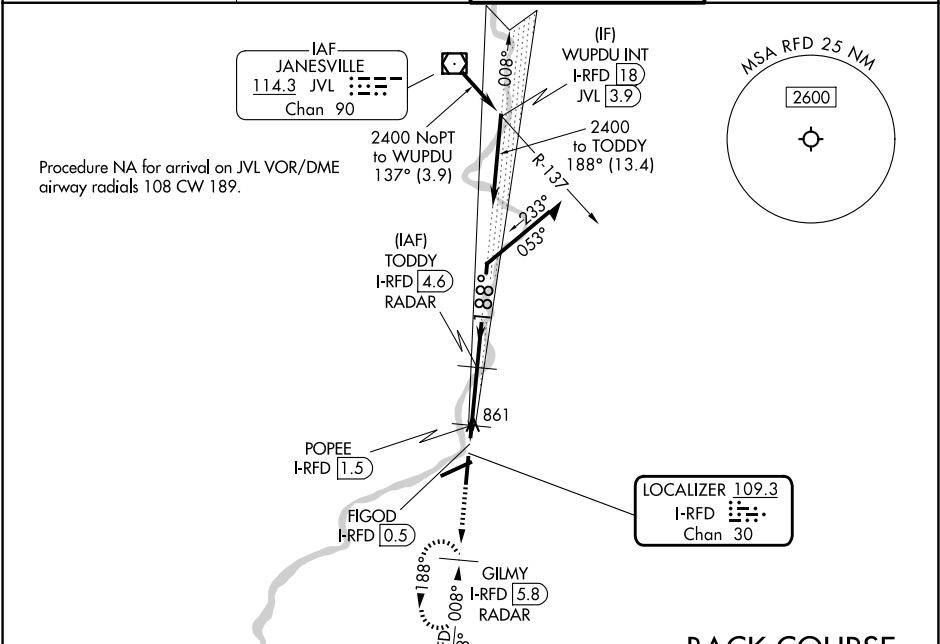

|                                                                                          |  |  |  |  |
|------------------------------------------------------------------------------------------|--|--|--|--|
| BACK COURSE                                                                              |  |  |  |  |
| 2500 I-RFD crs S (188°) GILMY I-RFD 5.8 RADAR TODDY I-RFD 4.6 RADAR                      |  |  |  |  |
| POPEE I-RFD 1.5 FIGOD I-RFD 0.5                                                          |  |  |  |  |
| 1260 1260 1260 1260 1260                                                                 |  |  |  |  |
| 0.8 NM 3.1 NM                                                                            |  |  |  |  |
| CATEGORY A B C D                                                                         |  |  |  |  |
| S-19 1260-1 524 (600-1) 1260-1½ 524 (600-1½)                                             |  |  |  |  |
| CIRCLING 1260-1 518 (600-1) 1280-1 538 (600-1) 1320-1½ 578 (600-1½) 1460-2¼ 718 (800-2¼) |  |  |  |  |
| POPEE FIX MINIMUMS (DME REQUIRED)                                                        |  |  |  |  |
| S-19 1140-1 404 (400-1) 1140-1⅛ 404 (400-1⅛)                                             |  |  |  |  |
| CIRCLING 1220-1 478 (500-1) 1280-1 538 (600-1) 1320-1½ 578 (600-1½) 1460-2¼ 718 (800-2¼) |  |  |  |  |