

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)

RNP APCH - GPS.

A For uncompensated Baro-VNAV systems, INAV/VNAV NA below -9°C or above 54°C.
When local altimeter setting not received, use Winder altimeter setting; increase LPV C/D to 1071 feet; increase INAV/VNAV DA to 1121 feet; increase all MDA 60 feet and increase INAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2 1/4 mile. For inop MALSF, increase INAV/VNAV all Cts visibility to 3/4 mile, increase INAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cts visibility to 3/4 mile, increase INAV/VNAV all Cts visibility to 1 mile, increase INAV Cat C/D visibility to 1 1/4 mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.



MALSF




MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
-----------------	------------------------------------	--	------------------	------------------

MISSED APCH FIX

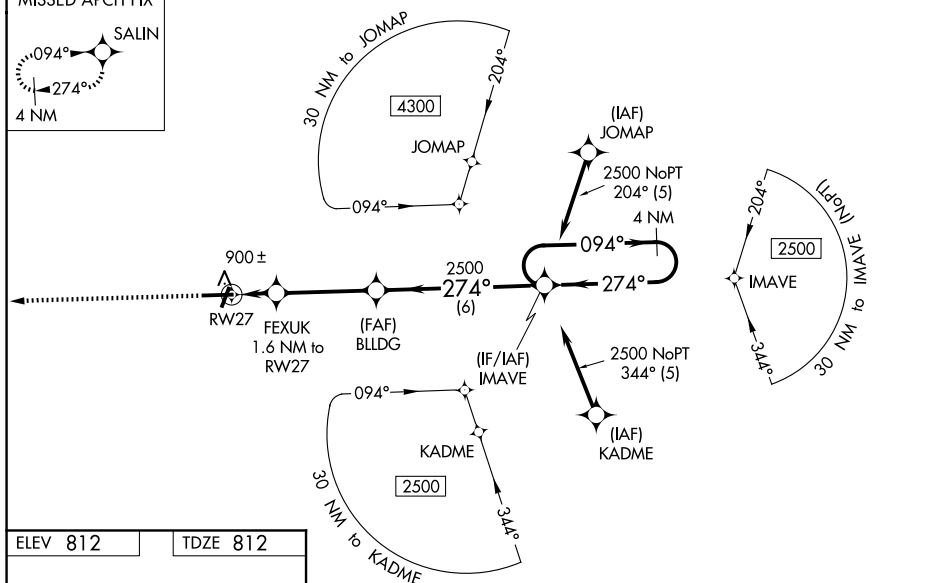

ELEV 812		TDZE 812
----------	--	----------



2500	SALIN
	

* LNAV only

Figure 1: Example of a 4 NM Holding Pattern. The diagram illustrates a flight path starting from the left, passing through a point labeled 'FEXUK 1.6 NM to RW27'. It then turns right to a heading of 274° and enters a 4 NM holding pattern around a fix labeled 'BLDNG 2500'. The pattern consists of two parallel legs, each 2.5 NM long, with a 180° turn between them. The outbound leg is labeled '2500' and the inbound leg is labeled '2500'. The holding pattern is labeled '4 NM Holding Pattern'. The aircraft is shown on the inbound leg, 2.5 NM from the fix. The diagram also shows a 'GP 3.00°' and 'TCH 40'.

CATEGORY	A	B	C	D
LPV DA	1012- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/ VNAV DA	1064- ³ / ₄ 252 (300- ³ / ₄)			
LNAV MDA	1160- ³ / ₄ 348 (400- ³ / ₄)			
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

ATHENS, GEORGIA
Amdt 1B 07OCT21

33°57'N-83°20'W

ATHENS/BEN EPPS (AHN)

RNAV (GPS) RWY 27

SE-4, 09 JUL 2026 to 06 AUG 2026

SE-4, 09 JUL 2026 to 06 AUG 2026