

LOC/DME I-MFE 111.7 Chan 54	APP CRS 137°	Rwy Ldg 6983 TDZE 107 Apt Elev 107
---	------------------------	---

ILS or LOC RWY 14
MC ALLEN INTL (MFE)

ADF required.


▼ Circling NA northeast of Rwy 14-32. When local altimeter setting not received, use
Weslaco altimeter setting: increase all DA 39 feet; increase all MDA 40 feet and S-LOC 14
▲ Cat C/D and Circling Cat C visibility $\frac{1}{8}$ mile, increase LOBIC Fix Minimums S-LOC 14
Cat C/D visibility $\frac{1}{4}$ mile. For inop ALS, increase S-LOC 14 Cat C/D visibility to 1% SM.
For inop ALS when using Weslaco altimeter setting, increase LOBIC Fix Minimums S-LOC
14 Cat C/D visibility to 1% SM.

MALSR




MISSED APPROACH:
Climb to 1500 then
climbing left turn to
2000 direct to MISSI
LOM and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER ★ 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
---------------	--------------------------------	--	------------------	------------------

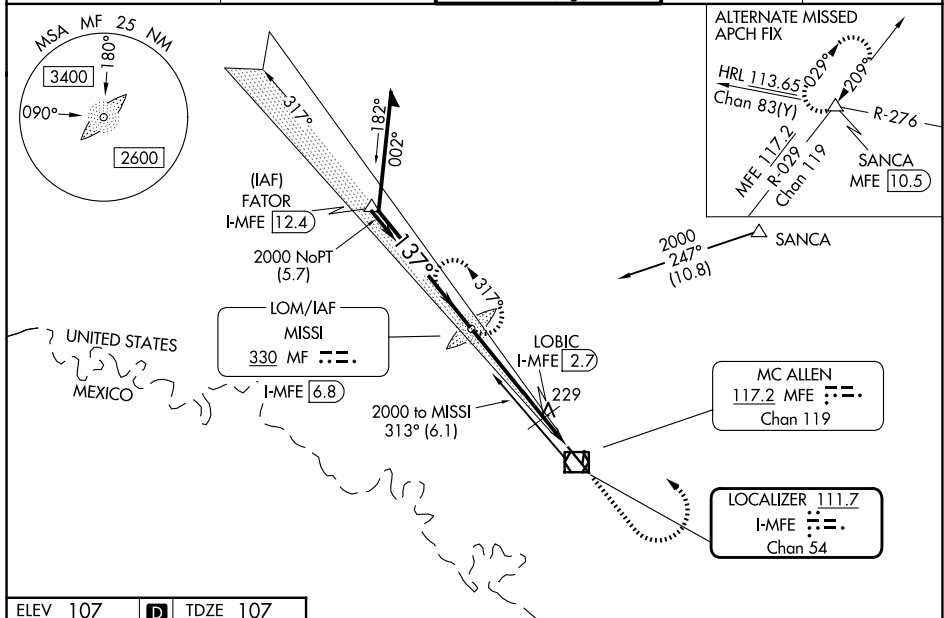

ELEV 107	D	TDZE 107
----------	----------	----------

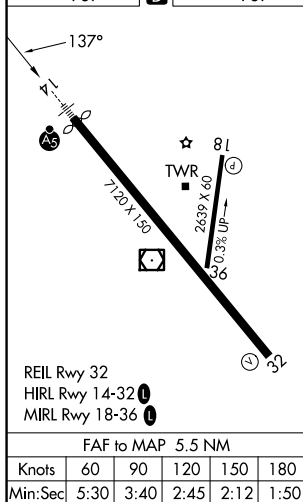

Remain within 10 NM

MISSI LOM/I-MFE

1952

2000

317°

137°

2000

GS 3.00° TCH 56

*620 when using Weslaco altimeter setting.

4.1 NM

1.4 NM

LOBIC I-MFE

2700

I-MFE 1.3

1500

2000

MF

*LOC only.