


WAA CH 78001 W32A	APP CRS 317°	Rwy Ldg TDZE Apt Elev	7120 102 107
---------------------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 32
MC ALLEN INTL (MFE)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility ¼ mile; increase all MDA 40 feet and LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER * 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------

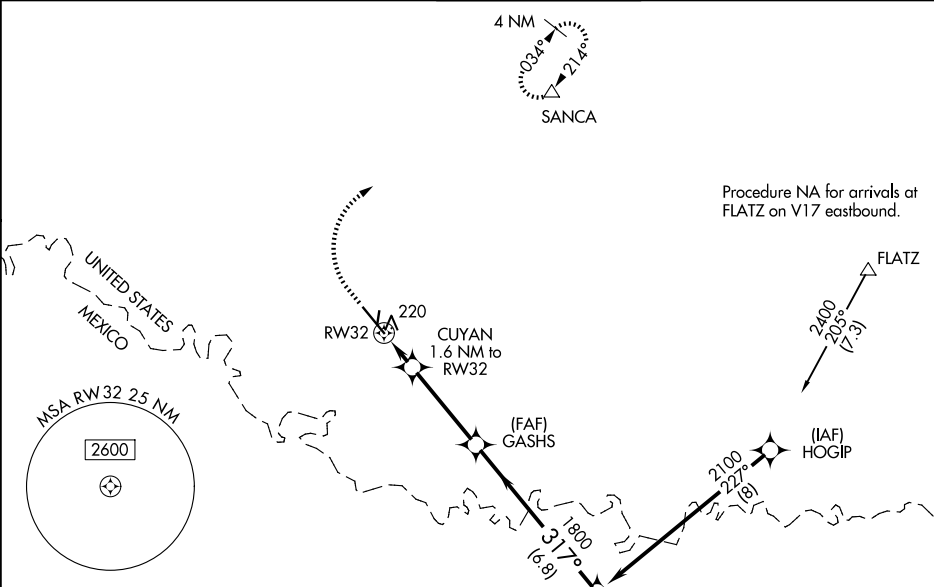

ELEV 107	D	TDZE 102
----------	----------	----------

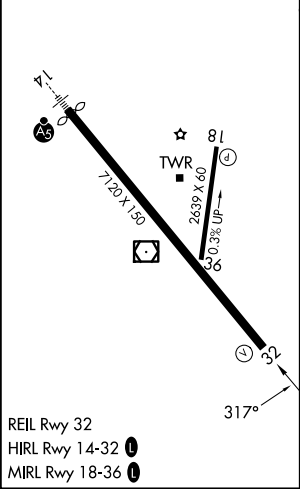

800 2000 SANCA

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 53).

FOVUD

*LNAV only

GASHS 1800

CUYAN 1.6 NM to RW32

*1 NM to RW32

RW32

*660

1800

2100

317°

GP 3.00° TCH 50

1 NM 0.6 3.6 NM 6.8 NM

CATEGORY	A	B	C	D
LPV DA		302-¾	200 (200-¾)	
LNAV/VNAV DA		391-⅞	289 (300-⅞)	
LNAV MDA		480-1	378 (400-1)	
CIRCLING	580-1	473 (500-1)	580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)

SC-3, 09 JUL 2026 to 06 AUG 2026

SC-3, 09 JUL 2026 to 06 AUG 2026