
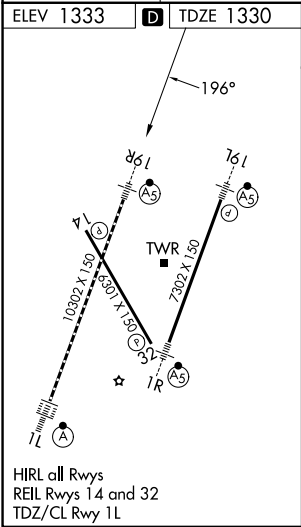


|                                        |                        |                                                                  |
|----------------------------------------|------------------------|------------------------------------------------------------------|
| WAAS<br>CH <b>63019</b><br><b>W19A</b> | APP CRS<br><b>196°</b> | Rwy Ldg <b>10302</b><br>TDZE <b>1330</b><br>Apt Elev <b>1333</b> |
|----------------------------------------|------------------------|------------------------------------------------------------------|

RNAV (GPS) Y RWY 19R  
WICHITA DWIGHT D EISENHOWER NTL (ICT)

|                                                                                                                                                                                                                                                   |           |                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------|
| <br>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C ( 5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA. | <br>MALSR | MISSED APPROACH: Climb to 3600 direct CUTIK and hold. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------|

|                       |                                       |                                     |                               |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|
| ATIS<br><b>125.15</b> | WICHITA APP CON<br><b>126.7 353.5</b> | WICHITA TOWER<br><b>118.2 257.8</b> | GND CON<br><b>121.9 348.6</b> |
|-----------------------|---------------------------------------|-------------------------------------|-------------------------------|

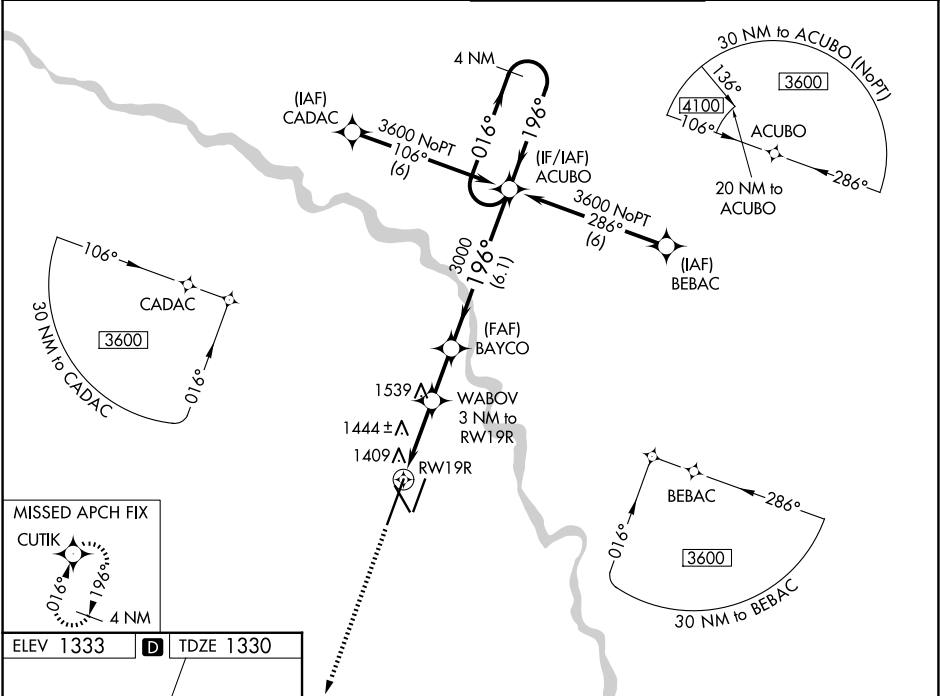

|                    |                     |   |                         |                       |
|--------------------|---------------------|---|-------------------------|-----------------------|
| 3600<br>↑<br>CUTIK |                     |   |                         |                       |
| *LNAV only.        | GP 3.00°<br>TCH 52  |   |                         |                       |
| CATEGORY           | A                   | B | C                       | D                     |
| LPV DA #           | 1530/24 200 (200-½) |   |                         |                       |
| LNAV/<br>VNAV DA   | 1742/45 412 (500-¾) |   |                         |                       |
| LNAV MDA           | 1740/24 410 (500-½) |   | 1740/40 410 (500-¾)     |                       |
| CIRCLING           | 1800-1 467 (500-1)  |   | 1980-1¾<br>647 (700-1¾) | 1980-2<br>647 (700-2) |

NC-2, 09 JUL 2026 to 06 AUG 2026

NC-2, 09 JUL 2026 to 06 AUG 2026