

WAAS CH 56401 W14A	APP CRS 139°	Rwy Ldg TDZE Apt Elev 6500 933 937
--	------------------------	--

RNAV (GPS) RWY 14

DELAWARE COUNTY RGNL (MIE)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using FWA altimeter setting. When local altimeter not received, use FWA altimeter setting and increase LPV DA to 1254 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1339 feet and all visibilities ¼ SM. Increase all MDAs 140 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.

MISSED APPROACH:
Climb to 2900 direct CITUK and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

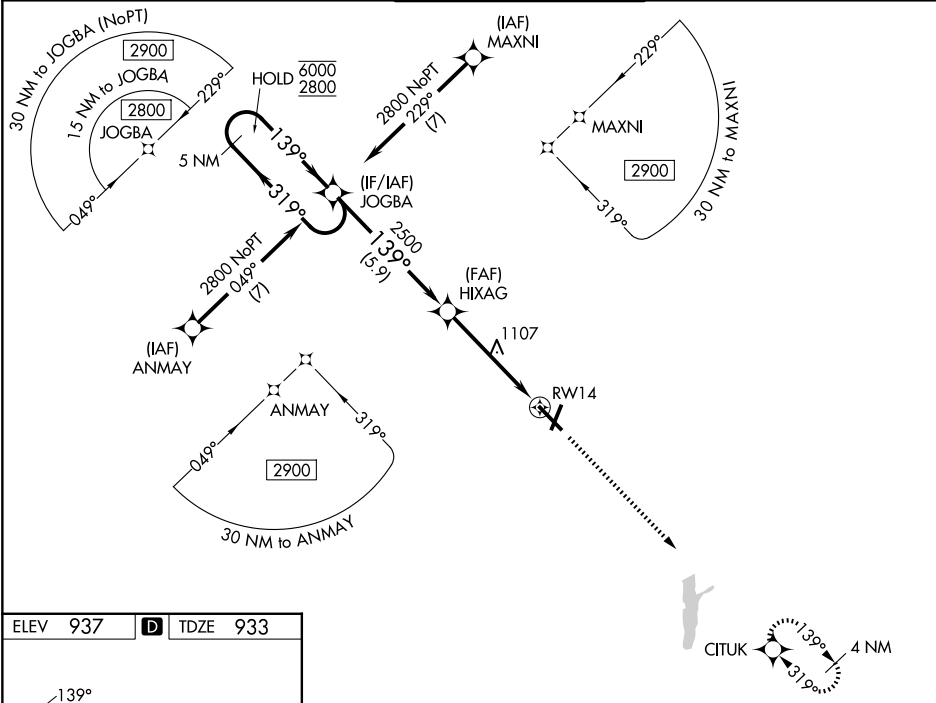

ELEV 937 **D** TDZE 933

HIRL Rwy 14-32 **L**
MIRL Rwy 3-21 **L**
REIL Rwy 3, 14 and 21 **L**

5 NM

Holding Pattern

6000

2800

←319°

→139°

GP 3.00°

TCH 50

JOGBA

HIXAG

2500

2500

139°

1.2 NM to RW14

RW14

2900

CITUK

5.9 NM

3.6 NM

1.2

CATEGORY	A	B	C	D
LPV DA	1133-¾		200 (200-¾)	
LNAV/VNAV DA	1218-7/8		285 (300-7/8)	
LNAV MDA	1360-1	427 (500-1)	1360-1¼	427 (500-1¼)
CIRCLING	1400-1	463 (500-1)	1500-1½ 563 (600-1½)	1560-2 623 (700-2)

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026