

APP CRS	Rwy Ldg	7510
312°	TDZE	43
	Apt Elev	46

RNAV (RNP) Z RWY 31
CORPUS CHRISTI INTL (CRP)


⚠ For uncompensated Baro-VNAV systems, procedure NA below -1°C (31°F) or above 54°C (130°F). GPS and RF required. For inop MALSR, increase RNP 0.14 all Cats visibility to ¾ mile.
*Missed approach requires minimum climb of 335 feet per NM to 500.

MALSR



MISSED APPROACH: Climb to 2000 on track 312° to ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15
---------------	---------------------------------	-----------------------------	-------------------------

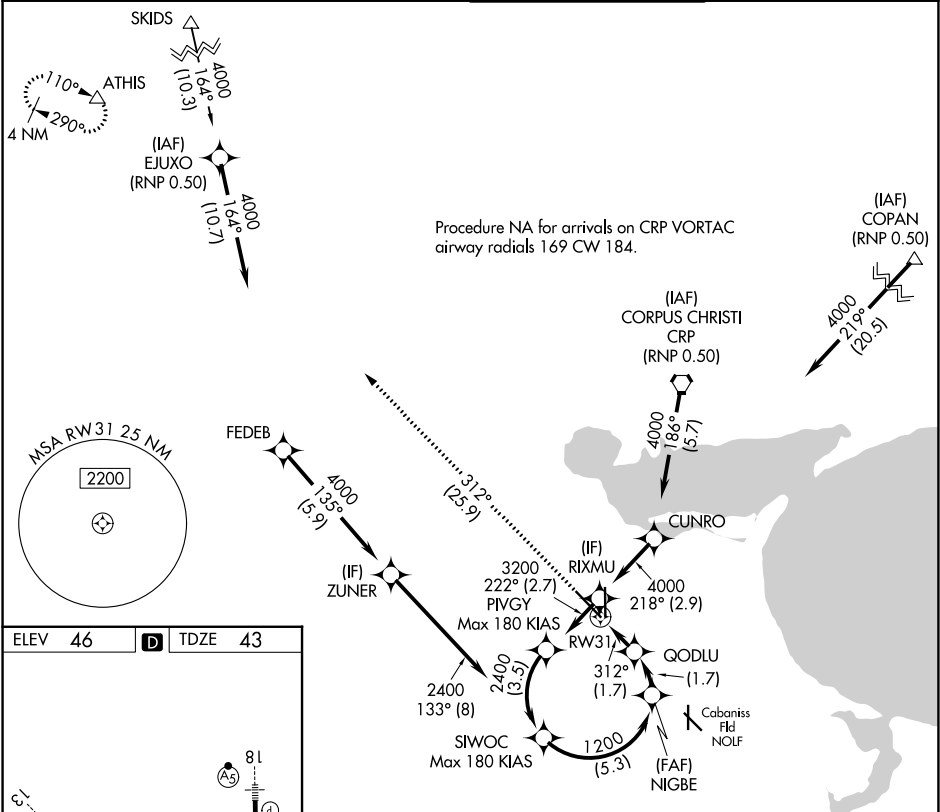

ELEV 46 **D** TDZE 43




Diagram of RWY 31 showing HIRL lights, altitudes (e.g., 6080 x 150, 36), and the 312° heading.

HIRL Rwy 31-36

2000	ATHIS	See planview for multiple IF locations.				SIWOC
↑ fr 312°	△					
RW31		QODLU 646	NIGBE 1200	2400		GP 3.00° TCH 50
		1.7 NM	1.7 NM	5.3 NM		
CATEGORY	A	B	C	D		
RNP 0.14 DA*		303-1/2	260 (300-1/2)			
RNP 0.30 DA		384-5/8	341 (400-5/8)			