


WAAS CH 42519 W10B	APP CRS 098°	Rwy Ldg TDZE Apt Elev	5001 906 906
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 10R
FLYING CLOUD (FCM)

RNP APCH.	MALSRL	MISSED APPROACH: Climb to 3000 direct JUDGU and on track 155° to ONARE and hold.
▼ Baro-VNAV NA when using Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet and increase LNAV Cat C visibility ¼ mile. For inoperative MALSRL increase LNAV Cat D visibility to 1¼. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.		

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER★ 125.2 (N) 119.15 (S) (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

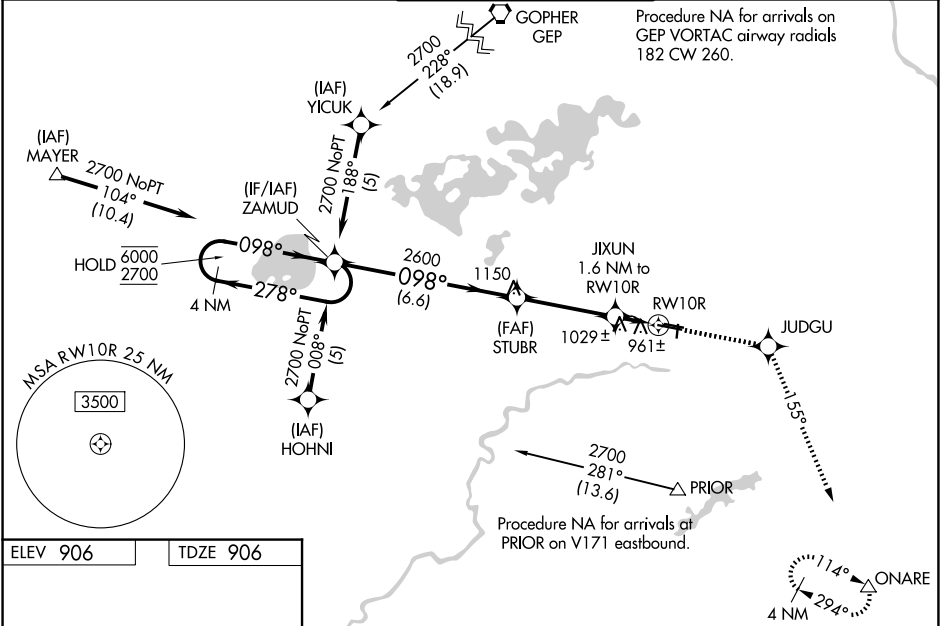

ELEV 906	TDZE 906
----------	----------



- HIRL Rwy 10R-28L
- REIL Rws 10L and 28R
- REIL Rws 18, 28L, and 36
- MIRL Rwy 10L-28R
- MIRL Rwy 18-36

4 NM Holding Pattern	ZAMUD	3000 JUDGU	tr 155°	ONARE
6000 ← 278°	098° →	2600	JIXUN 1.6 NM to RWY10R	*LNAV only.
GP 3.00°	TCH 42	*1440	RWY10R	
	6.6 NM	3.6 NM	1.6	
CATEGORY	A	B	C	D
LPV DA		1106-½	200 (200-½)	
LNAV/VNAV DA		1237-¾	331 (400-¾)	
LNAV MDA		1280-½	374 (400-½)	1280-1 374 (400-1)
CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)

NC-1, 09 JUL 2026 to 06 AUG 2026

NC-1, 09 JUL 2026 to 06 AUG 2026