




CHICAGO DEP CON
133.5 349.0
ATIS
132.075
GND CON
121.8
DUPAGE TOWER
120.9 257.8

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
ASSIGNED BY ATC

TAKEOFF MINIMUMS:
Rwys 2L/R, 10, 20L/R, 28, 33: Standard.
Rwy 15: 300-1% or standard with minimum climb
of 210'/NM to 1000.

NOTE: Turbojet departures maintain 250K
until advised by ATC.
NOTE: ROBERTS Transition: For aircraft inbound
to CMI or STL, or as assigned by ATC.

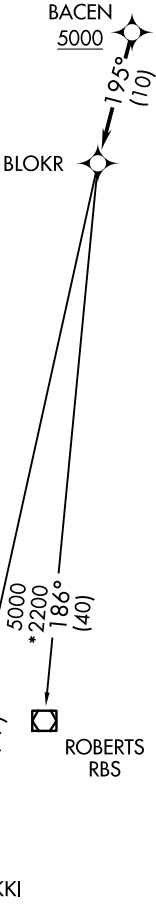

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 2L/R: Climb on heading 015° to 1260,
for vectors to BACEN, thence. . . .

TAKEOFF RUNWAY 10: Climb on heading 097° to 1260,
for vectors to BACEN, thence. . . .

TAKEOFF RUNWAY 15: Climb on heading 149° to 1260,
for vectors to BACEN, thence. . . .

TAKEOFF RUNWAYS 20L/R: Climb on heading 195° to 1260,
for vectors to BACEN, thence. . . .

TAKEOFF RUNWAY 28: Climb on heading 277° to 1260,
for vectors to BACEN, thence. . . .

TAKEOFF RUNWAY 33: Climb on heading 329° to 1260,
for vectors to BACEN, thence. . . .

. . . .on track 195° to BLOKR, then on transition, maintain ATC
assigned altitude. Expect filed altitude 10 minutes after departure.

BEKKI TRANSITION (BLOKR8.BEKKI):
ROBERTS TRANSITION (BLOKR8.RBS):

NOTE: Chart not to scale.