

WAAS CH 70511 W10A	APP CRS 096°	Rwy Ldg 6498 TDZE 609 Apt Elev 609
--	------------------------	--

RNAV (GPS) RWY 10

DELTA COUNTY (ESC)

RNP APCH - GPS.

T


A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2500 direct
ZUMAB and hold.

AWOS-3PT 121.425	MINNEAPOLIS CENTER 127.65	UNICOM 122.8 (CTAF)
----------------------------	-------------------------------------	-------------------------------

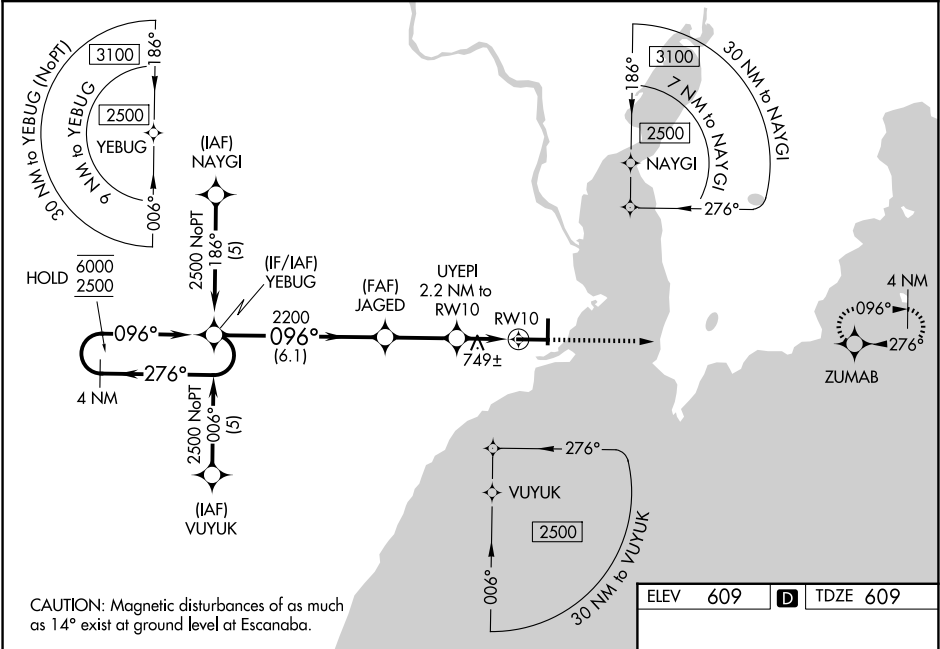

4 NM Holding Pattern

GP 3.00°
TCH 56

YEBUG

JAGED

UYEPI
2.2 NM to RW10

1 NM to RW10

RW10

6.1 NM

2.6 NM

1.2 NM

1 NM

CATEGORY	A	B	C	D
LPV DA	809-1/2		200 (200-1/2)	
LNAV/VNAV DA	967-5/8		358 (400-5/8)	
LNAV MDA	1000-1/2	391 (400-1/2)	1000-5/8	391 (400-5/8)
CIRCLING	1060-1 451 (500-1)	1080-1 471 (500-1)	1280-2 671 (700-2)	1480-2 3/4 871 (900-2 3/4)

ELEV 609

TDZE 609

ZUMAB

6498 X 150

5016 X 100

28 0.3% UP

HIRL Rwy 10-28

MIRL Rwy 1-19

REIL Rws 1 and 28