

LOC/DME I-GSP

109.3

Chan 30

APP CRS

038°

Rwy Ldg

11001

TDZE

947

Apt Elev

964

ILS or LOC RWY 4

GREENVILLE SPARTANBURG INTL (GSP)


DME required.

For inop ALS, increase S-LOC 4 Cats C and D visibility to RVR 5500. When local altimeter setting not received, use Greenville Downtown altimeter setting: increase DA to 1176 feet; increase all MDAs 40 feet and visibility S-LOC 4 Cat C/D to RVR 4000 and Circling Cat D ¼ SM. For inop ALS, when using Greenville Downtown altimeter setting, increase S-LOC 4 Cats C/D visibility to RVR 6000.

ALS-2

MISSED APPROACH:
Climb to 3000 then right turn direct SPA VORTAC and hold.

ATIS	GREER APP CON★	GREER TOWER★	GND CON	UNICOM
134.25	118.8 270.275	120.1(CTAF) 251.15	121.9	122.95

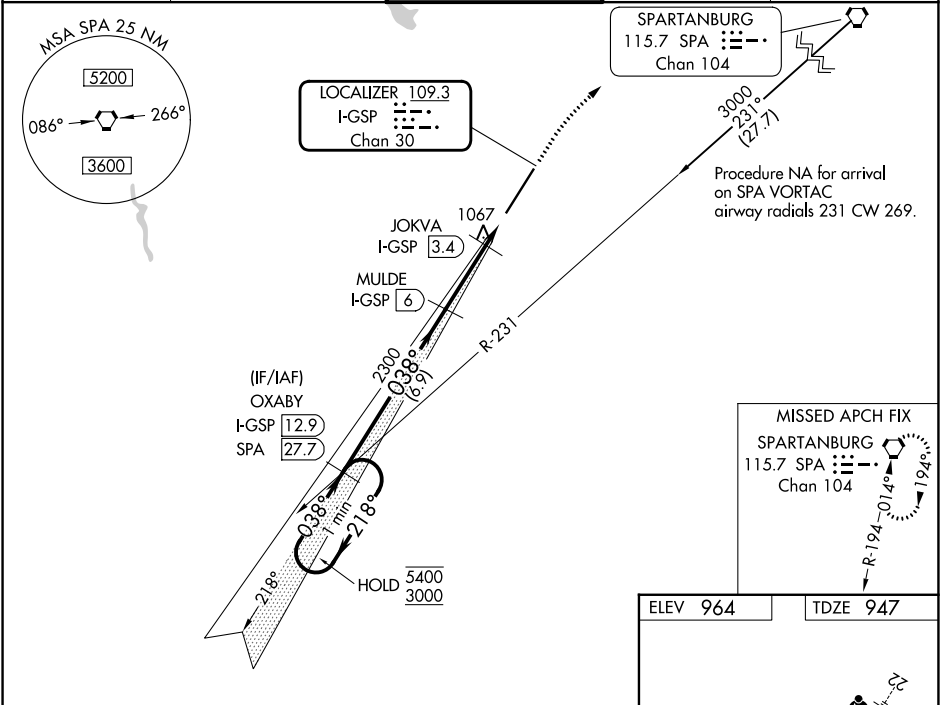

One Minute Holding Pattern		OXABY I-GSP 12.9	MULDE I-GSP 6	JOKVA I-GSP 3.4	SPA
5400 ← 218°		3000 → 038°	2300	*LOC only.	
GS 3.00° TCH 55		2300	*1460	I-GSP 1.9	
6.9 NM		2.6 NM	1.5 NM		
CATEGORY	A	B	C	D	
S-ILS 4	1147/18 200 (200-½)				
S-LOC 4	1320/24	373 (400-½)	1320/35	373 (400-¾)	
CIRCLING	1440-1	476 (500-1)	1480-1½ 516 (600-1½)	1700-2¼ 736 (800-2¼)	

ELEV 964

TDZE 947

1100 X 150

TWR

RCLS Rwy 22

HIRL Rwy 4-22

TDZL/RCLS Rwy 4