


APP CRS	Rwy Ldg	4011
095°	TDZE	663
	Apt Elev	663

RNAV (GPS) RWY 9

FREMONT (14G)

RNP APCH.	Procedure NA at night. Use Sandusky County Rgnl altimeter setting; when not received use Toledo Executive altimeter setting: increase all MDA 40 feet and LNAV Cat D and Circling Cat C and D visibility ¼ SM. Rwy 9 helicopter visibility reduction below 1 SM NA. Circling NA to Rwys 18-36. MISSED APPROACH: Climbing right turn to 2600 direct KADBY and hold.
-----------	--

TOLEDO APP CON	UNICOM
126.1 307.0	122.8 (CTAF) 0

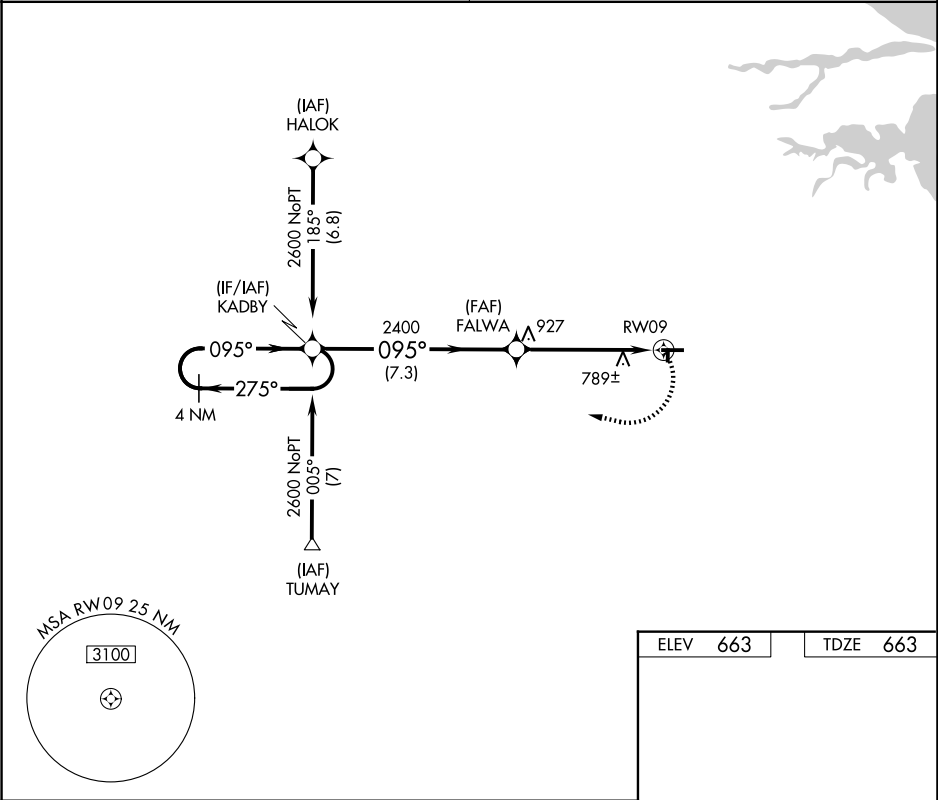

4 NM Holding Pattern KADBY FALWA RW09 2600 2400 275° 095° 095° 3.05° 7.3 NM 5.3 NM				2600 KADBY	095° 81 4137 X 60 27 2238 X 130 36
CATEGORY	A	B	C	D	
LNAV MDA	1080-1	417 (500-1)	1080-1¼	417 (500-1¼)	
CIRCLING	1240-1	577 (600-1)	1240-1½ 577 (600-1½)	1380-2¼ 717 (800-2¼)	
					LURL Rwy 9-27 0★