
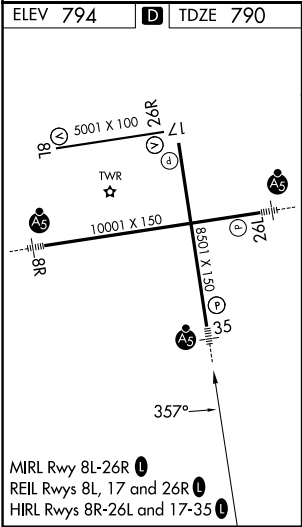


WAAS CH 87112 W35A	APP CRS 357°	Rwy Ldg TDZE 790 Apt Elev 794
--	------------------------	---

RNAV (GPS) RWY 35

GERALD R FORD INTL (G.R.R.)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 3000 direct HABKO and on track 352° to CLOCK and hold.
RADAR required for procedure entry.				
▼▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV Cat D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.				
ATIS 118.725	GREAT LAKES APP CON★ 128.4 257.6	GRAND RAPIDS TOWER ★ 135.65 (CTAF) 0 339.8	GND CON 121.8	UNICOM 122.95

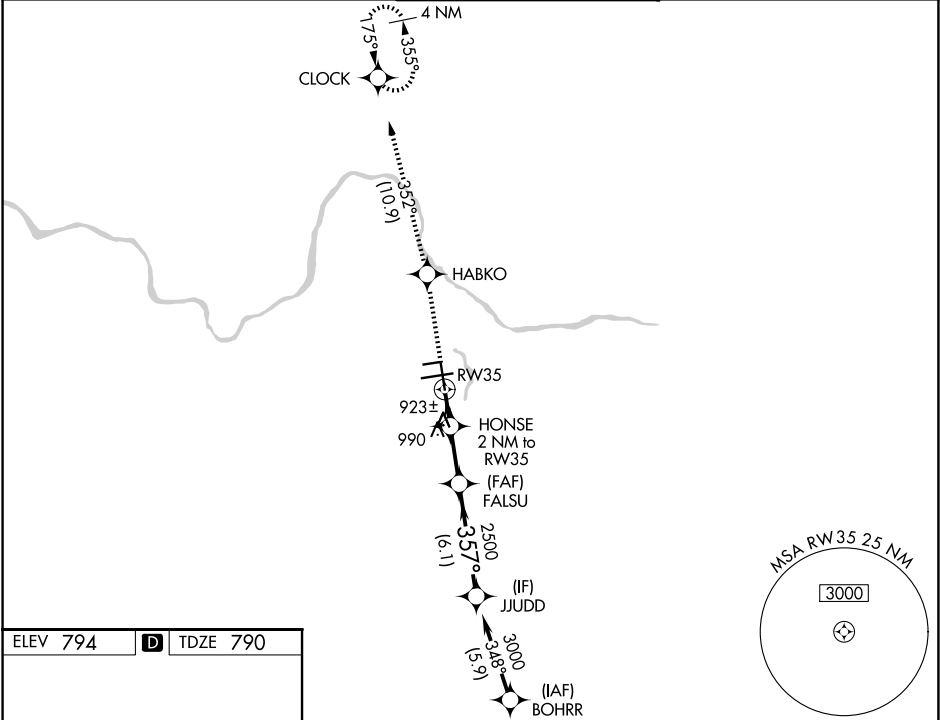

3000	HABKO	CLOCK	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).	JJUDD
↑	★	tr 352°	FALSU	3000
	HONSE 2 NM to RW35		2500	357°
	1 NM to RW35		1480	2500
	RW35		1 NM 1 NM 3.1 NM 6.1 NM	GP 3.00° TCH 55
CATEGORY	A	B	C	D
LPV DA*	990/24	200 (200-½)		
LNAV/VNAV DA	1236/50	446 (500-1)		
LNAV MDA	1180/24 390 (400-½)	1180/35 390 (400-½)	1180/50 390 (400-1)	
CIRCLING	1260-1 466 (500-1)	1340-1½ 546 (600-1½)	1360-2 566 (600-2)	