

LOC/DME I-GFK 109.1 Chan 28	APP CRS 174°	Rwy Ldg TDZE 7351 843 Apt Elev 845
---	------------------------	--

LOC BC RWY 17R



GRAND FORKS INTL (GFK)

DME or ADF or RADAR required.

▼ When local altimeter setting not received, use Crookston altimeter setting and increase all MDA 80 feet; increase S-17R Cat C visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Increase WUSIK fix minimums S-17R Cat C visibility and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climb to 2600 on I-GFK south course (174°) to HISER LOM/I-GFK 6.9 DME/RADAR and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95
----------------------	---	---	---------------------------	-------------------------

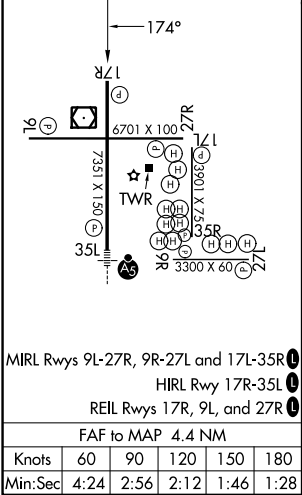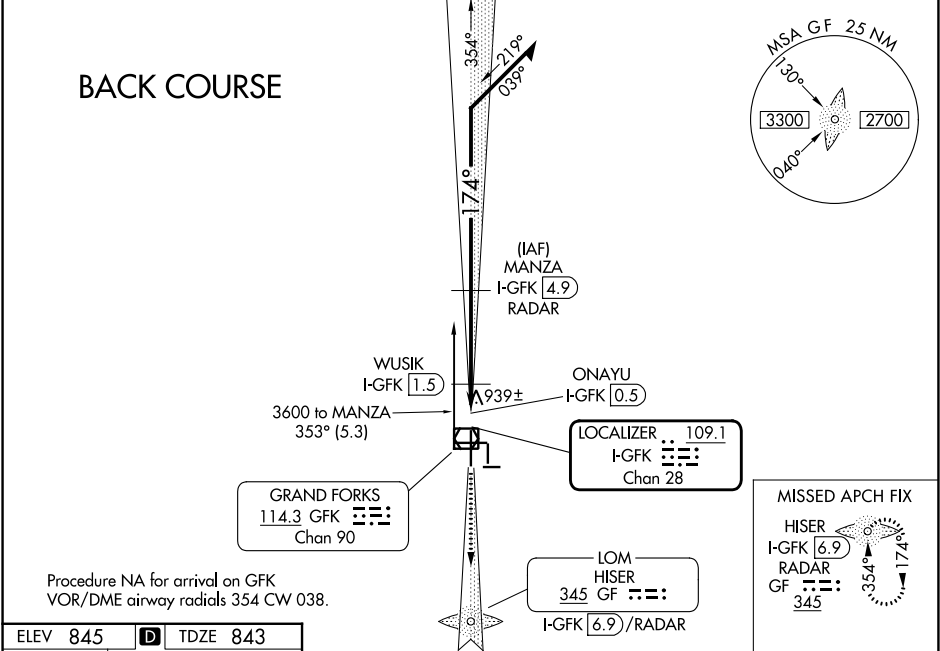

Disregard glideslope indications.

Remain within 10 NM

*1380 when using Crookston altimeter setting.

CATEGORY	A	B	C	D
S-17R	1300-1 457 (500-1)	1300-1 457 (500-1 1/2)	1300-1 457 (500-1 1/2)	1300-1 457 (500-1 1/2)
CIRCLING	1300-1 455 (500-1)	1300-1 455 (500-1)	1300-1 455 (500-1)	1300-1 455 (500-1)
WUSIK FIX MINIMUMS				
S-17R	1200-1 357 (400-1)	1200-1 357 (400-1)	1200-1 357 (400-1)	1200-1 357 (400-1)
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 555 (500-1 1/2)	1420-2 575 (600-2)