


WAAS CH 78104 W27A	APP CRS 264°	Rwy Ldg TDZE 843 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 27R

GRAND FORKS INTL (GFK)

RNP APCH - GPS.	▼ Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting and increase LPV DA to 1104 feet and all visibilities $\frac{1}{8}$ SM. Increase LNAV/VNAV DA to 1178 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D $\frac{3}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.	MISSED APPROACH: Climb to 4000 direct DUCEV and hold, continue climb-in-hold to 4000.
-----------------	--	---

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95
----------------------	---	--	---------------------------	-------------------------

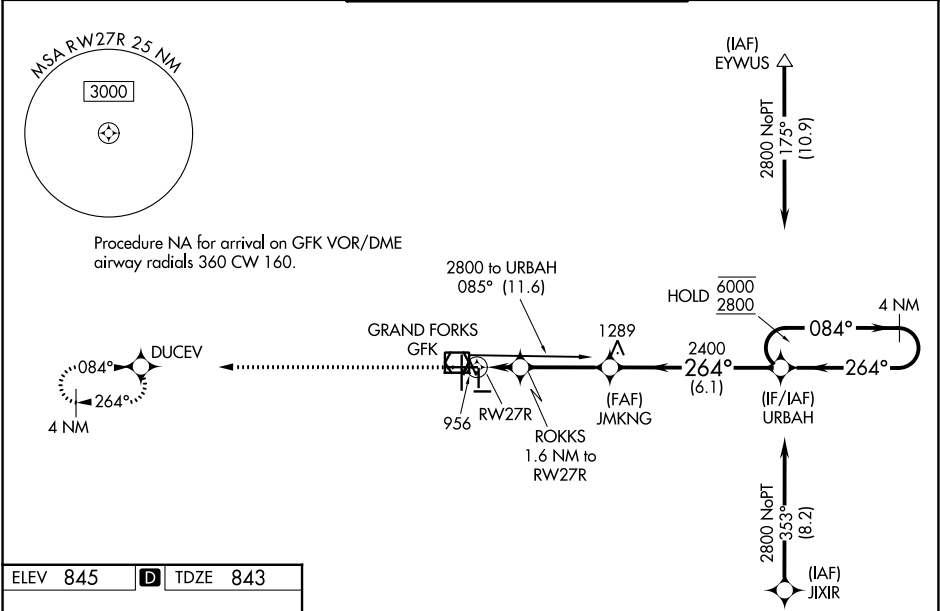

ELEV 845	D	TDZE 843
----------	----------	----------

