
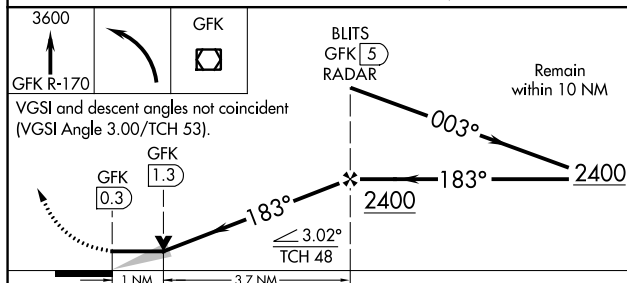



VOR RWY 17R
GRAND FORKS INTL (GFK)


T When local altimeter setting not received, use Crookston altimeter setting and increase all MDAs 80 feet; Increase Cat C/D visibility to 1 3/8 SM and Circling Cat C visibility 1/4 SM.
A VDP NA with Crookston altimeter setting.

KS TOWER★ 35 (17R/35L, 9L/27R) (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95
--	---------------------------	-------------------------

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4 (CTAF) 0 350.35 (17R/35L, 9L/27R) 120.55 350.35 (17L/35R, 9R/27L)	GND CON 124.575	UNICOM 122.95
----------------------	---	---	---------------------------	-------------------------

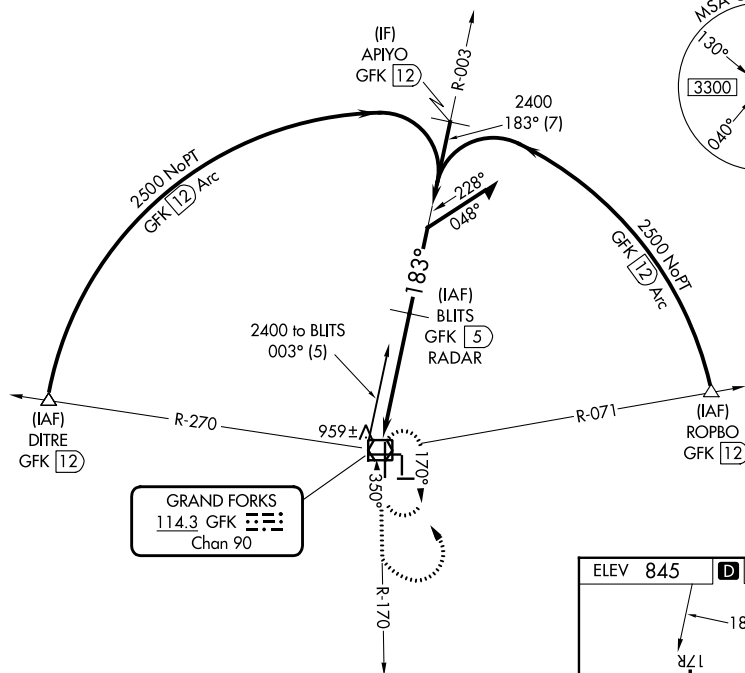

CATEGORY	A	B	C	D
S-17R	1220-1 377 (400-1)			1220-1½ 377 (400-1½)
CIRCLING	1280-1 435 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1420-2 575 (600-2)

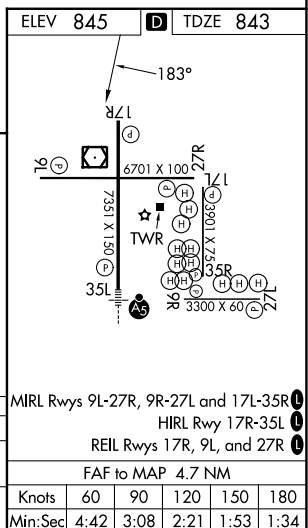

NC-1, 09 JUL 2026 to 06 AUG 2026