

WAAS CH 82312 W09A	APP CRS 089°	Rwy Ldg TDZE Apt Elev	5000 910 912
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

ANOKA COUNTY/BLAINE (JANES FLD) (A.N.E.)


RNP APCH - GPS.

T

When local altimeter setting not received, use Crystal altimeter setting: increase LPV DA to 1246 feet and all visibilities $\frac{1}{8}$ SM; increase LNAV/VNAV DA to 1373 feet; increase all MDA 40 feet and LNAV Cat C/D visibility $\frac{1}{8}$ SM and Circling Cat D visibility $\frac{1}{2}$ SM. Baro-VNAV and VDP NA when using Crystal altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3100 direct JUDAL and hold.

ATIS 120.625	MINNEAPOLIS APP CON 126.5 335.65	ANOKA TOWER★ 132.4 (CTAF) 0	GND CON 121.85	UNICOM 122.95
------------------------	--	---------------------------------------	--------------------------	-------------------------

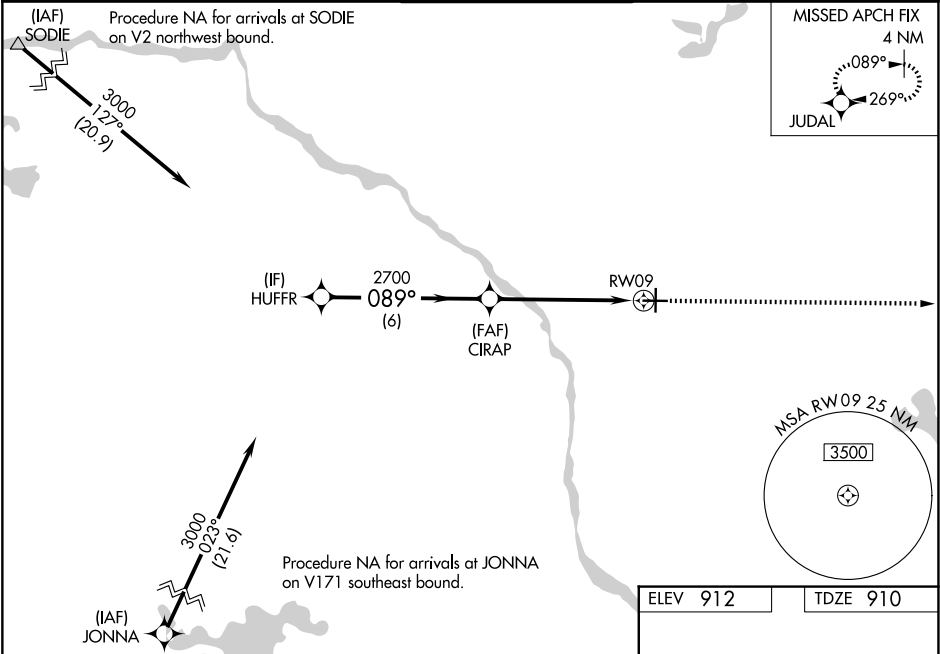

HUFFR		CIRAP		JUDAL	
3000		2700		3100	
GP 3.00°		089°		* LNAV only.	
TCH 40		2700		* 1.3 NM to RWY 9	
6 NM		4.2 NM		1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1225- $\frac{7}{8}$		315 (400- $\frac{7}{8}$)		
LNAV/VNAV DA	1352-1 $\frac{3}{8}$		442 (500-1 $\frac{3}{8}$)		
LNAV MDA	1340-1	430 (500-1)	1340-1 $\frac{1}{4}$	430 (500-1 $\frac{1}{4}$)	
CIRCLING	1400-1	488 (500-1)	1460-1 $\frac{1}{2}$ 548 (600-1 $\frac{1}{2}$)	1580-2 668 (700-2)	

ELEV 912 TDZE 910

HIRL Rwy 9-27

MIRL Rwy 18-36

REIL Rwy 9, 18 and 36