
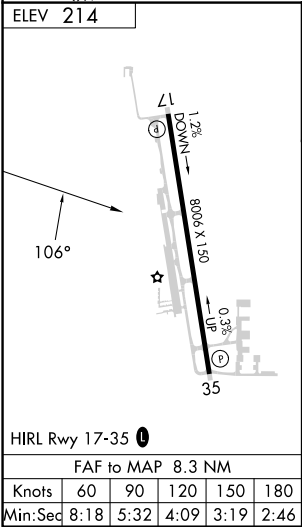


VORTAC CEW 115.9 Chan 106	APP CRS 106°	Rwy Ldg TDZE Apt Elev N/A N/A 214
---	------------------------	---

VOR-A

BOB SIKES(CEW)

▼ ▲ Circling NA for Cat D west of Rwy 17-35. When local altimeter setting not received, use Eglin AFB altimeter setting and increase all MDA 60 feet and increase Circling Cat C/D visibility ¼ SM.	MISSED APPROACH: Climb to 1200 then climbing left turn to 2200 direct CEW VORTAC and hold.	
ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 123.075 (CTAF) 0

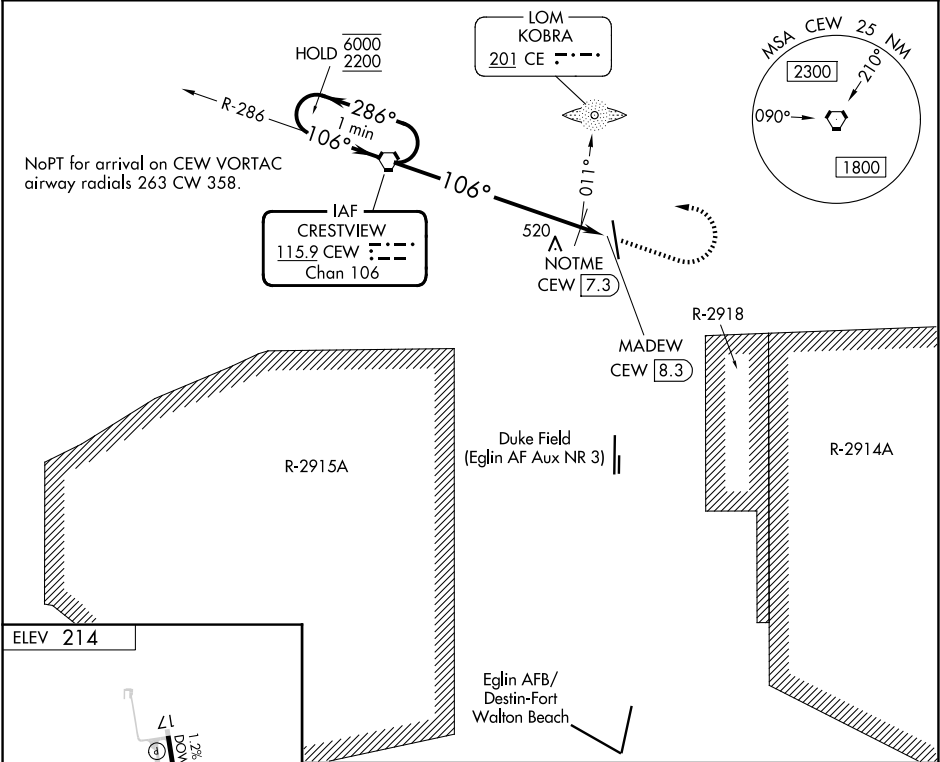

One Minute Holding Pattern		CEW VORTAC		1200	2200	CEW
6000 2200 ←286° →106°		NOTME CEW 7.3 MADEW CEW 8.3 106° *900 *960 when using Eglin AFB altimeter setting.		7.3 NM		1 NM
CATEGORY	A	B	C	D		
CIRCLING	900-1	686 (700-1)	900-2	900-2¼	686 (700-2)	686 (700-2¼)
NOTME FIX MINIMUMS (ADF OR DME REQUIRED)						
CIRCLING	700-1	486 (500-1)	820-1¾	840-2	606 (700-1¾)	626 (700-2)