

LOC I-CPS 109.1	APP CRS 302°	Rwy Ldg TDZE 411 Apt Elev 413
---------------------------	------------------------	---

ILS or LOC RWY 30L

ST LOUIS DOWNTOWN (CPS)


⚠

Circling Rwy 5, 23 NA at night. When local altimeter setting not received, use STL altimeter setting and increase S-ILS 30L DA to 663 feet; increase all MDAs 60 feet and S-LOC 30L visibility Cat C/D ½ SM, and Circling visibility Cat C ¼ SM. For inop ALS increase S-LOC 30L Cat C/D visibility to 1¼ SM.


MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 220° and STL R-170 to ARNOL INT/STL 36.2 DME and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

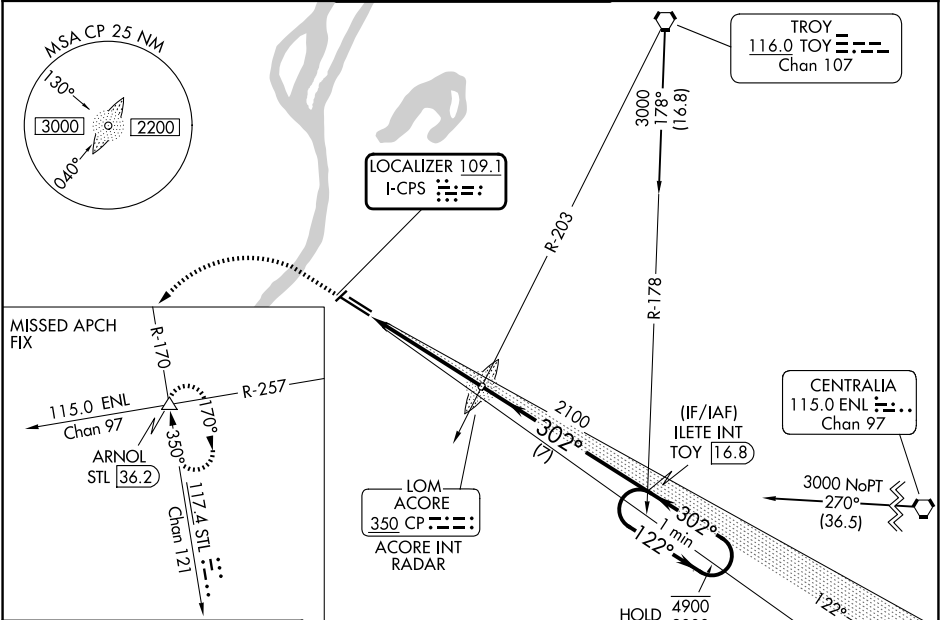

ELEV 413	D	TDZE 411
-----------------	----------	-----------------

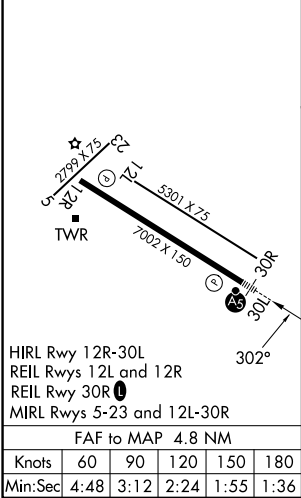

One Minute Holding Pattern			
1400 3000 hdg 220°		STL R-170	ARNOL
CP LOM ACORE INT RADAR		ILETE INT TOY 16.8	
1990		302°	122°
2100		4900	3000
4.8 NM		7 NM	GS 3.00° TCH 55
CATEGORY	A	B	C
S-ILS 30L	611-½		200 (200-½)
S-LOC 30L	1020-½	609 (700-½)	1020-⅓ 609 (700-⅓)
CIRCLING	1020-1 607 (700-1)	1120-1 707 (800-1)	1240-2½ 827 (900-2½) 1380-3 967 (1000-3)