

WAAS

CH 81812

W05A

APP CRS

051°

Rwy Ldg

6001

TDZE

726

Apt Elev

728

RNAV (GPS) RWY 5

WAUKEGAN NTL (UGN)

RNP APCH - GPS.


▼

▲

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 14, 32 NA at night.

MISSED APPROACH: Climb to 2300 direct LIRIC and hold.

ATIS 132.4	CHICAGO APP CON 120.55	WAUKEGAN TOWER ★ 120.05(CTAF) 273.55	GND CON 121.65
---------------	---------------------------	---	-------------------

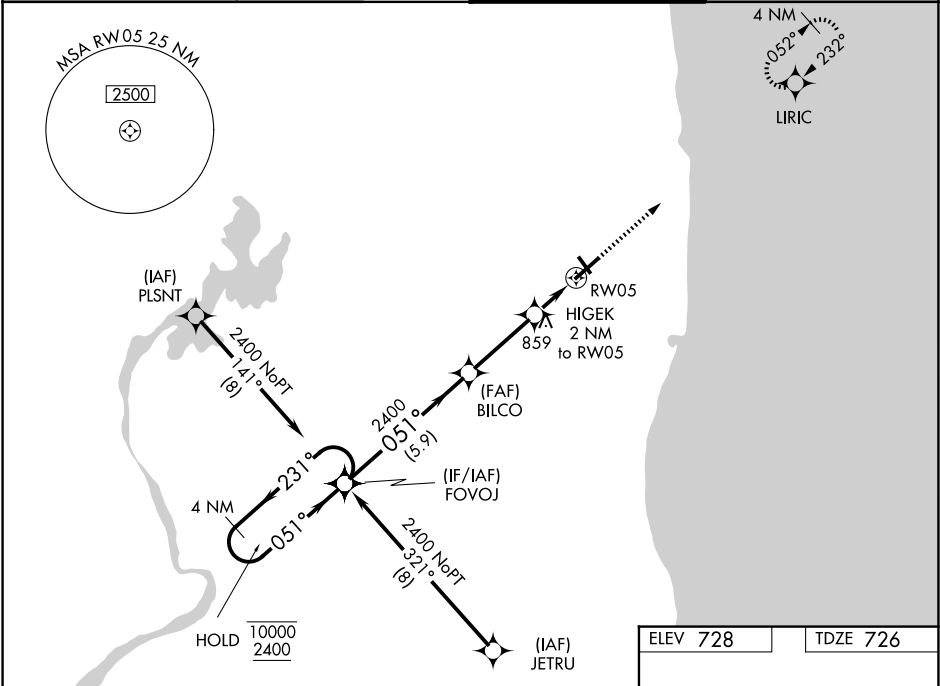

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

2300 LIRIC

FOFVJ

BILCO

HIGEK 2 NM to RWY 05

1.1 NM to RWY 05

RWY 05

10000 2400

GP 3.00° TCH 40

231°

051°

2400

1400

5.9 NM

3.1 NM

0.9 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	976-¾ 250 (300-¾)			
LNAV/VNAV DA	1013-⅞ 287 (300-⅞)			
LNAV MDA	1120-1	394 (400-1)	1120-1⅛	394 (400-1⅛)
CIRCLING	1220-1	492 (500-1)	1220-1½ 492 (500-1½)	1400-2¼ 672 (700-2¼)

051°

6001 X 150

0.38

32

TWR

REIL Rwy 5

HIRL Rwy 5-23

MIRL Rwy 14-32