


ATIS
125.175
CLNC DEL
120.2
GND CON
121.8
MANASSAS TOWER ★
133.1 (CTAF) 360.75
POTOMAC DEP CON
128.525 306.925

TOP ALTITUDE:
3000

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: Turbojets only.

TAKEOFF MINIMUMS:

Rwys 16L/R: Standard with minimum
climb of 500' per NM to 710.
Rwys 34L/R: Standard with minimum
climb of 500' per NM to 710, then
minimum climb of 335' per NM to 3800.

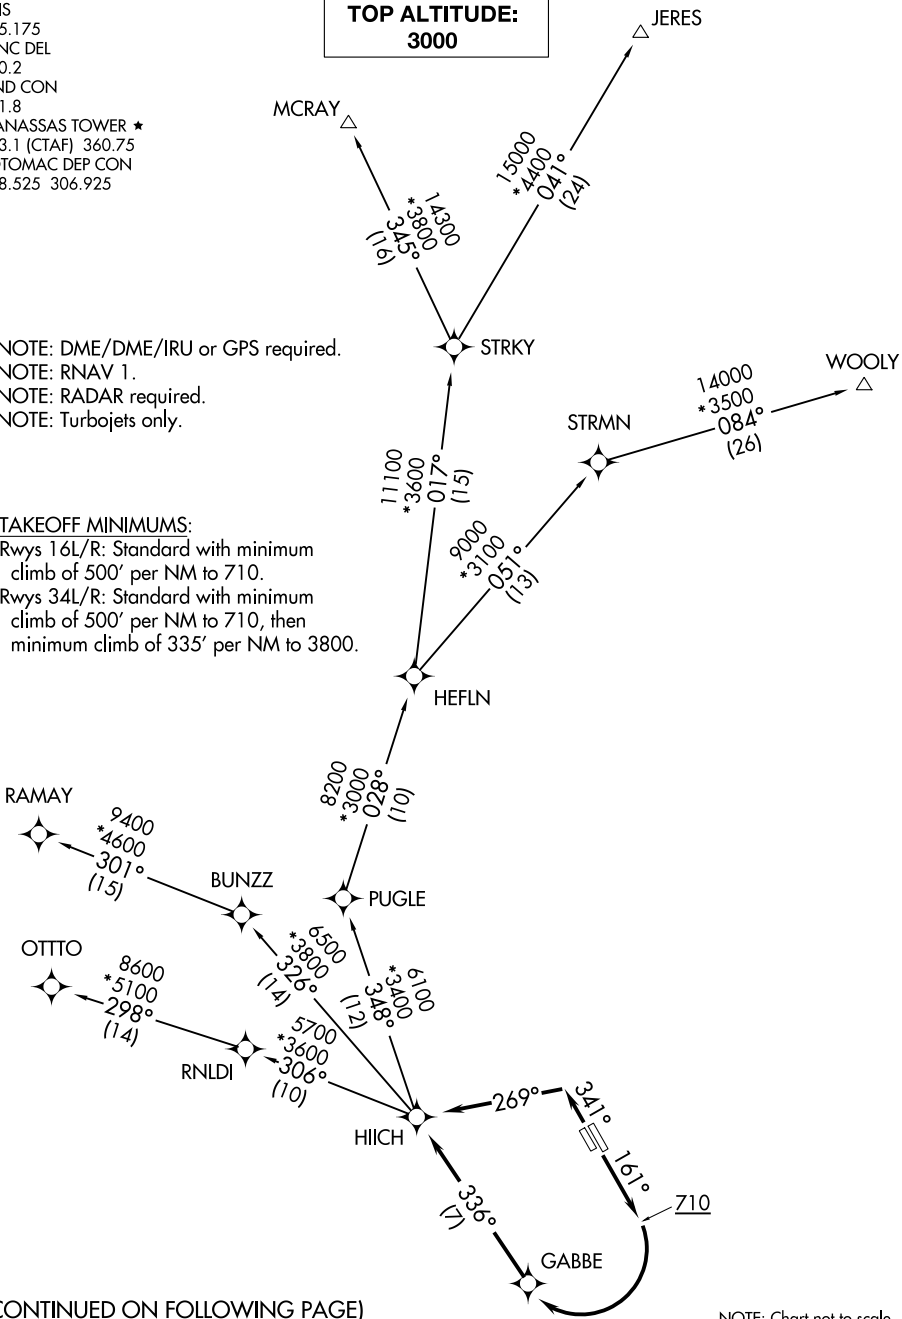

DEPARTURE ROUTE DESCRIPTION	
TAKEOFF RUNWAYS 16L/R: Climb heading 161° to 710, then right turn direct GABBE, then on track 336° to HIICH, thence TAKEOFF RUNWAYS 34L/R: Climb heading 341° to intercept course 269° to HIICH, thence on assigned transition. Maintain 3000. Expect clearance to filed altitude within 10 minutes after departure. <u>JERES TRANSITION (HIICH2.JERES)</u> <u>MCRAY TRANSITION (HIICH2.MCRAY)</u> <u>OTTO TRANSITION (HIICH2.OTTO)</u> <u>RAMAY TRANSITION (HIICH2.RAMAY)</u> <u>WOOLY TRANSITION (HIICH2.WOOLY)</u>	