

LOC I-HEF
109.1

APP CRS
161°

Rwy Ldg
TDZE
Apt Elev
6200
192
192

ILS or LOC RWY 16L

WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

When local altimeter setting not received, use Dulles altimeter setting and increase DA 49 feet, all MDA 60 feet, and increase Cat C/D Circling visibility ¼ mile.

MALS R


MISSED APPROACH: Climb to 700, then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS
125.175

POTOMAC APP CON
128.525 306.925

MANASSAS TOWER ★
133.1 (CTAF) 0 360.75

GND CON
121.8

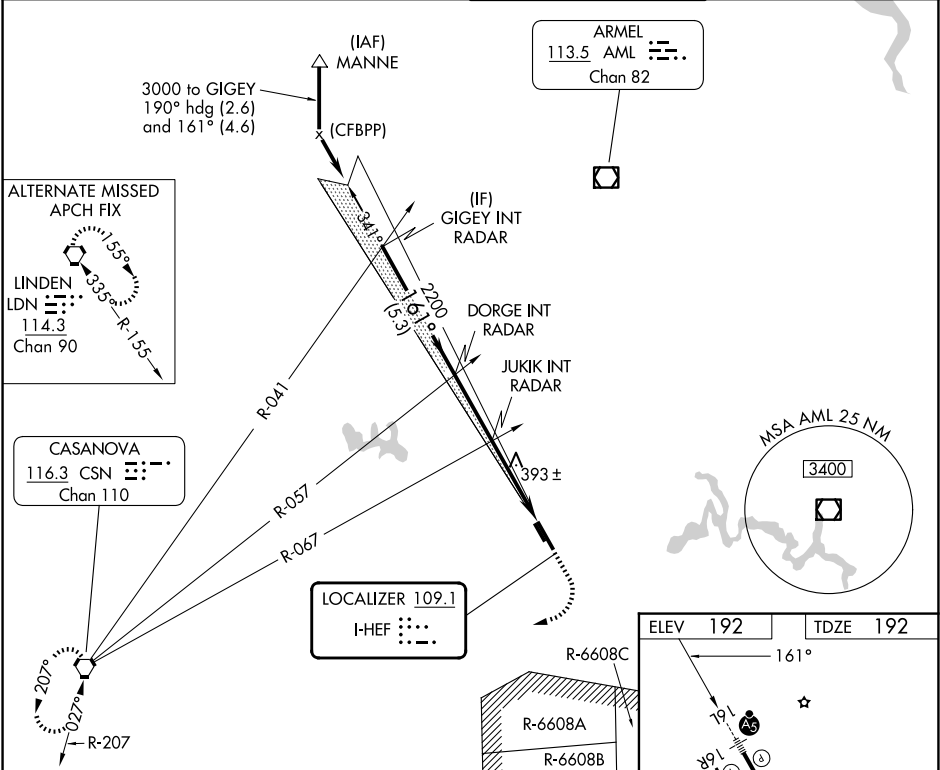

GIGEY INT RADAR 3000 161° GS 3.00° TCH 58				DORGE INT RADAR 2200				JUKIK INT RADAR *1300				700 3000 CSN *LOC only.			
5.3 NM				2.7 NM				3.4 NM							
CATEGORY		A		B		C		D							
S-ILS 16L				392-½		200 (200-½)									
S-LOC 16L		660-½		468 (500-½)		660-1		468 (500-1)							
CIRCLING		720-1		740-1		840-1¾		880-2¼							
		528 (600-1)		548 (600-1)		648 (700-1¾)		688 (700-2¼)							

3715 X 75

6200 X 100

0.38 UP

34L

34R

TWR

34R

HIRL Rwy 16L-34R

MIRL Rwy 16R-34L

REIL Rws 16R and 34L

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02