

WAAS
CH **70302**
W16A

APP CRS
161°

Rwy Ldg
TDZE **192**
Apt Elev **192**

RNAV (GPS) RWY 16L


WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.
▲

MALSR
AS

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8
------------------------	---	--	-------------------------

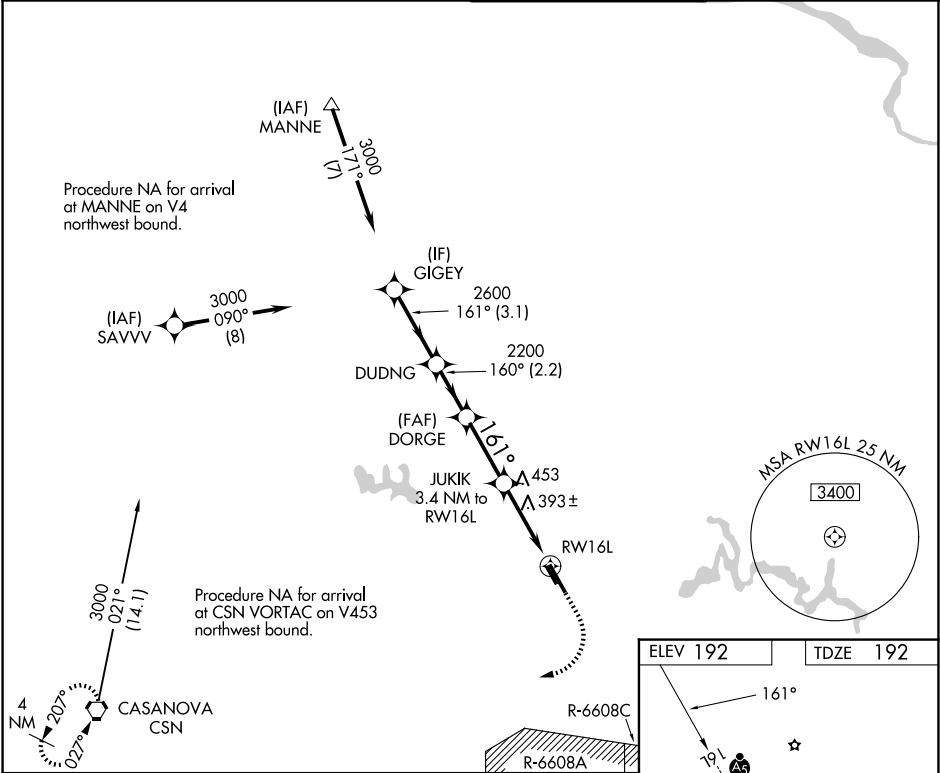

GIGEY		DUDNG	DORGE	JUKIK	CSN
3000		2600	2200	1320	3000
GP 3.00° TCH 58					
3.1 NM		2.2 NM	2.7 NM	2.1 NM	1.3 NM
CATEGORY	A	B	C	D	
LPV DA	442-½ 250 (300-½)				
LNAV/VNAV DA	635-7/8 443 (500-7/8)				
LNAV MDA	660-½	468 (500-½)	660-1	468 (500-1)	
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1¾ 648 (700-1¾)	880-2¼ 688 (700-2¼)	

ELEV 192

TDZE 192

161°

AS

3400

MSA RW16L 25 NM

R-6608C

R-6608A

CSN

TWR

34L

34R

HIRL Rwy 16L-34R

MIRL Rwy 16R-34L

REIL Rwy 16R and 34L