
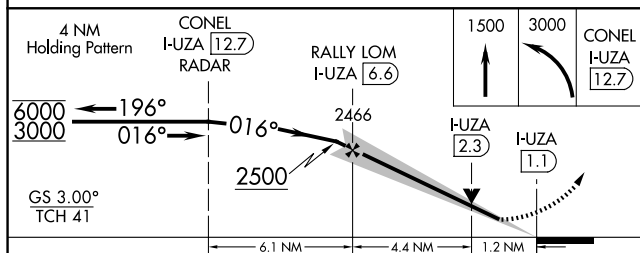


ILS or LOC RWY 2
ROCK HILL/YORK COUNTY/BRYANT FLD (UZA)

V
A VDP NA when using CLT altimeter setting. When local altimeter setting not received, use CLT altimeter setting and increase S-ILS 2 DA to 910 feet; increase all MDAs 60 feet and S-LOC 2 visibility Cat C and D $\frac{1}{4}$ SM. For inop ALS, increase S-LOC 2 Cat C and D visibility to $\frac{1}{8}$ SM.

MALSR
 MISSED APPROACH:
Climb to 1500 then
climbing left turn to
3000 direct CONEL
and hold.

ASOS 120.775	CHARLOTTE APP CON 120.05 307.8	GCO 121.725	UNICOM 123.05 (CTAF) 
-----------------	-----------------------------------	----------------	---

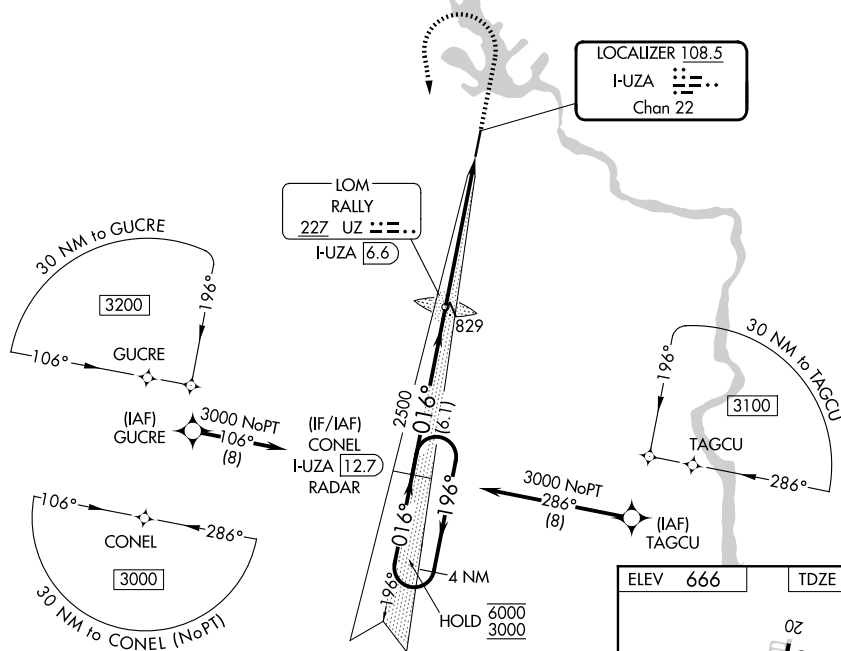

CATEGORY	A	B	C	D
S-ILS 2	866- ¹ / ₂ 200 (200- ¹ / ₂)			
S-LOC 2	1080- ¹ / ₂ 414 (500- ¹ / ₂)		1080- ³ / ₄ 414 (500- ³ / ₄)	
CIRCLING	1140-1 474 (500-1)	1160-1 494 (500-1)	1340-2 674 (700-2)	1340-2 ¹ / ₄ 674 (700-2 ¹ / ₄)

