

WAAS CH 45720 W27A	APP CRS 272°	Rwy Ldg TDZE Apt Elev	5004 903 905
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27L
OHIO STATE UNIVERSITY (OSU)


RNP APCH.

⚠ Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1178 feet; increase LNAV/VNAV DA to 1224 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 40 feet and visibility LNAV Cat C $\frac{1}{2}$ SM and Cat D $\frac{1}{4}$ SM, and Circling Cat D $\frac{1}{4}$ SM. Circling Rwy 23 NA at night. Rwy 27L helicopter visibility reduction below $\frac{1}{4}$ SM NA.


MISSED APPROACH:
Climb to 3200 direct
GLYBU and hold.

ATIS 121.35	COLUMBUS APP CON 125.95 317.775	STATE TOWER ★ 118.8 (CTAF) 254.325	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

Procedure NA for arrivals
on APE VORTAC
airway radials 168 CW 006.

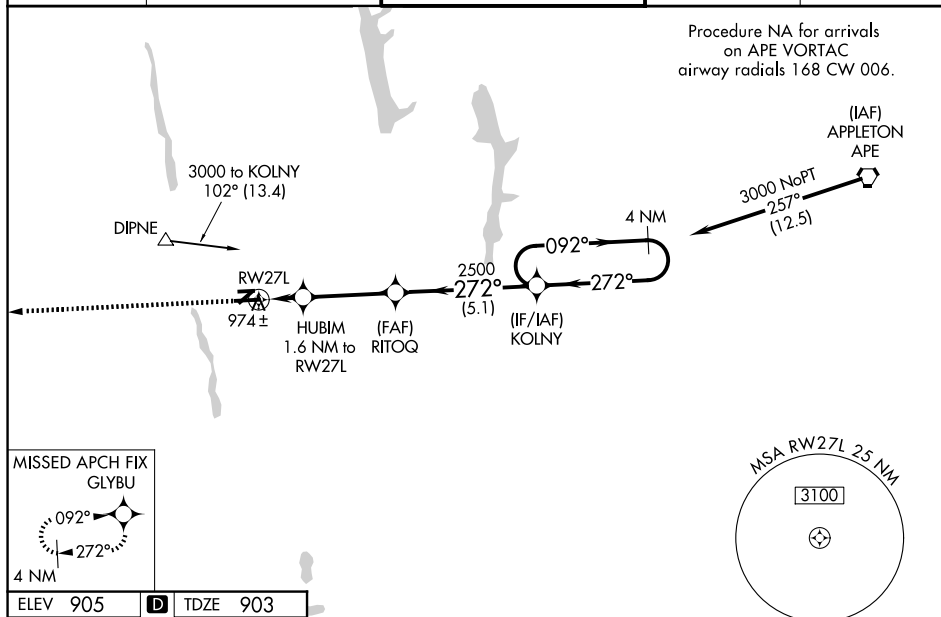

ELEV 905	D	TDZE 903
----------	----------	----------

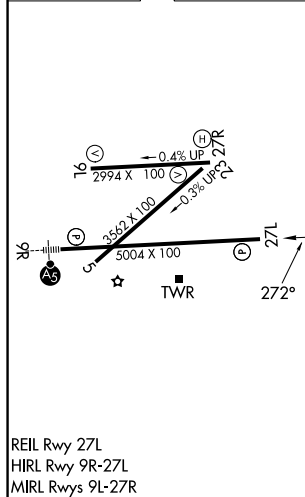

3200
↑
GLYBU
VGS and RNAV glidepath not coincident
(VGS Angle 3.00/TCH 28)
KOLNY
4 NM
Holding Pattern
RITOQ
2500
HUBIM
1.6 NM to
RW27L
RW27L
*1420
272°
092°
3000
GP 3.00°
TCH 45°
1.6 NM
3.3 NM
5.1 NM
CATEGORY
LPV DA
LNAV/VNAV DA
LNAV MDA
CIRCLING
A
B
C
D
1153-1
250 (300-1)
1199-1
296 (300-1)
1280-1
377 (400-1)
1280-1½
377 (400-1½)
1380-1
475 (500-1)
1420-1
515 (600-1)
1420-1½
515 (600-1½)
1680-2½
775 (800-2½)

EC-2, 09 JUL 2026 to 06 AUG 2026