



WAAS CH 97414 W26A	APP CRS 259°	Rwy Ldg TDZE 463 Apt Elev 463
--	------------------------	---


RNAV (GPS) RWY 26R

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using STL altimeter setting. Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use STL altimeter setting: increase LPV DA to 798 feet, increase LNAV/VNAV DA to 823 feet; increase all MDAs 60 feet.	MISSED APPROACH: Climb to 3000 direct EXESS and hold.
-----------------	--	---

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 0 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

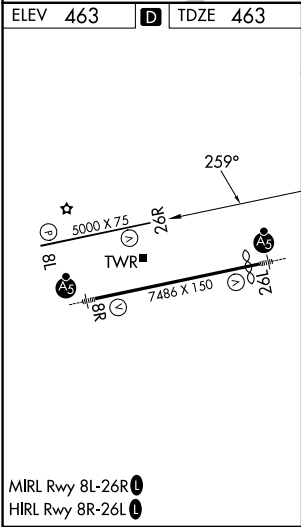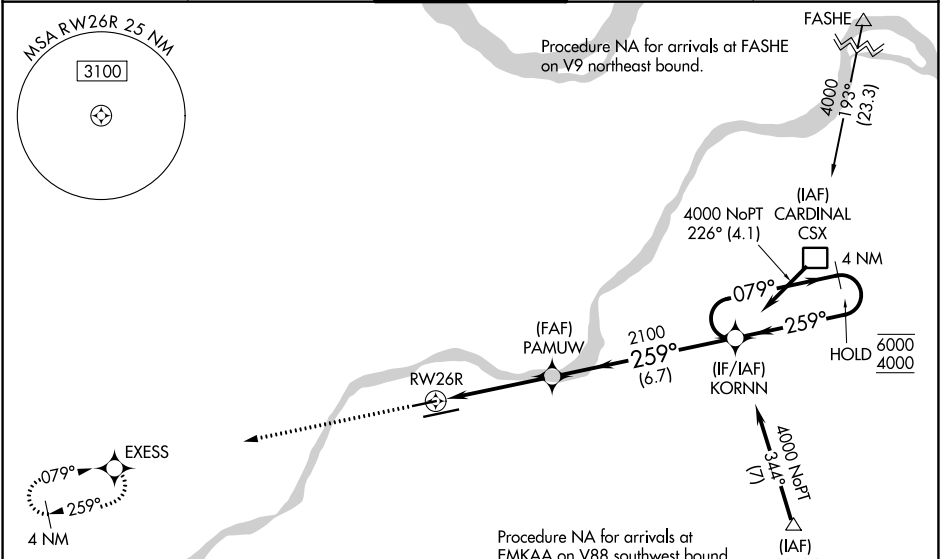

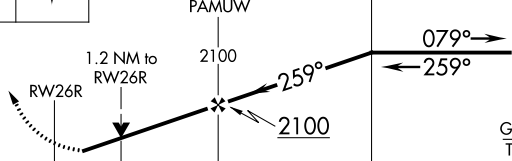3000 ↑		EXESS 							
CATEGORY		A		B		C		D	
LPV DA		755-1 292 (300-1)				NA			
LNAV/VNAV DA		780-1 317 (400-1)				NA			
LNAV MDA		940-1 477 (500-1)				NA			
CIRCLING		1100-1 637 (700-1)		1140-1 677 (700-1)		NA			

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026