

WAAS CH 61114 W08B	APP CRS 079°	Rwy Ldg TDZE 462 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 8R

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using STL altimeter setting. When local altimeter setting not received, use STL altimeter setting and increase LPV DA to 719 feet, increase LNAV/VNAV DA to 1186 feet, increase all MDA 60 feet, increase visibility LNAV/VNAV all Cats and LNAV Cats C/D ½ SM, and Circling Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 2 ½ SM and LNAV Cats C/D visibility to 1 ½ SM. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using STL altimeter setting.

MALSR

MISSED APPROACH:
Climb to 3000 direct HUGGE and right turn on track 175° to BNANA and right turn on track 272° to DERDF and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

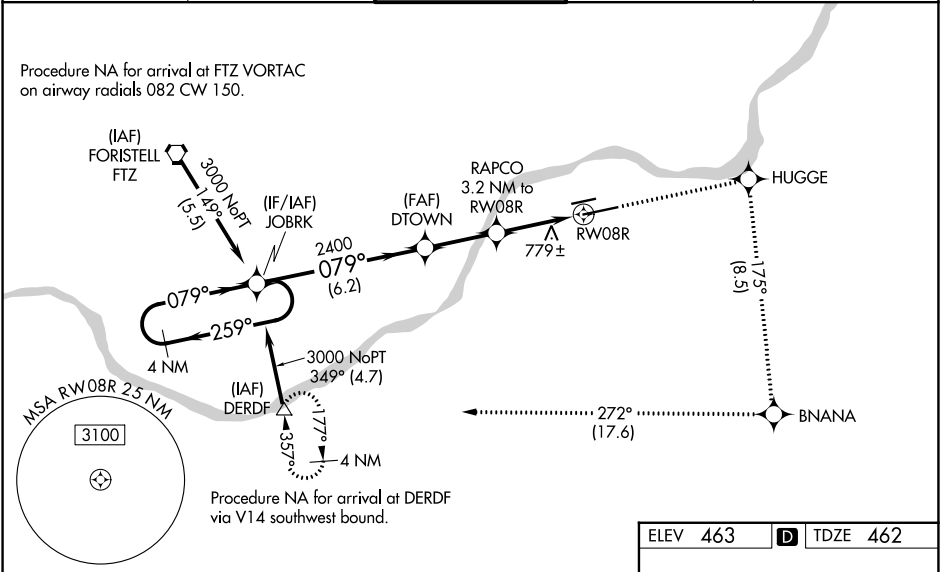

4 NM Holding Pattern

JOBRK

3000

GP 3.00° TCH 55

259°

079°

2400

6.2 NM

2.6 NM

1.6 NM

1.6 NM

DTOWN

RAPCO 3.2 NM to RW08R

*1.6 NM to RW08R

RW08R

*1540

2400

3000

HUGGE

BNANA

DERDF

*LNAV only

CATEGORY	A	B	C	D
LPV DA#		662/24	200 (200-½)	
LNAV/VNAV DA		1129-1⅞	667 (700-1⅞)	
LNAV MDA	1040/24	578 (600-½)	1040-1¼	578 (600-1¼)
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

ELEV 463

TDZE 462

MIRL Rwy 8L-26R

HIRL Rwy 8R-26L