

WAAS CH 86627 W30A	APP CRS 302°	Rwy Ldg 5500 TDZE 1145 Apt Elev 1145
--	------------------------	---

RNAV (GPS) RWY 30

OWATONNA DEGNER RGNL (OWA)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME/RNP-0.3 NA. When local altimeter setting not received, use Fairbault altimeter setting and increase all DA 41 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, increase LNAV Cats C/D visibility to 1 mile, Cat C Circling visibility to 1¾ mile and Cat D visibility to 2½ mile. VDP and Baro-VNAV NA when using Fairbault altimeter setting. For inop MALSR increase LNAV/VNAV all Cats visibility to 1¾ miles. For inop MALSR, when using Fairbault altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 1¾ mile.

MALSR




MISSED APPROACH:
Climb to 2800 direct
NOVSY and hold.

AWOS-3 128.325	ROCHESTER APP CON ★ 119.8 251.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

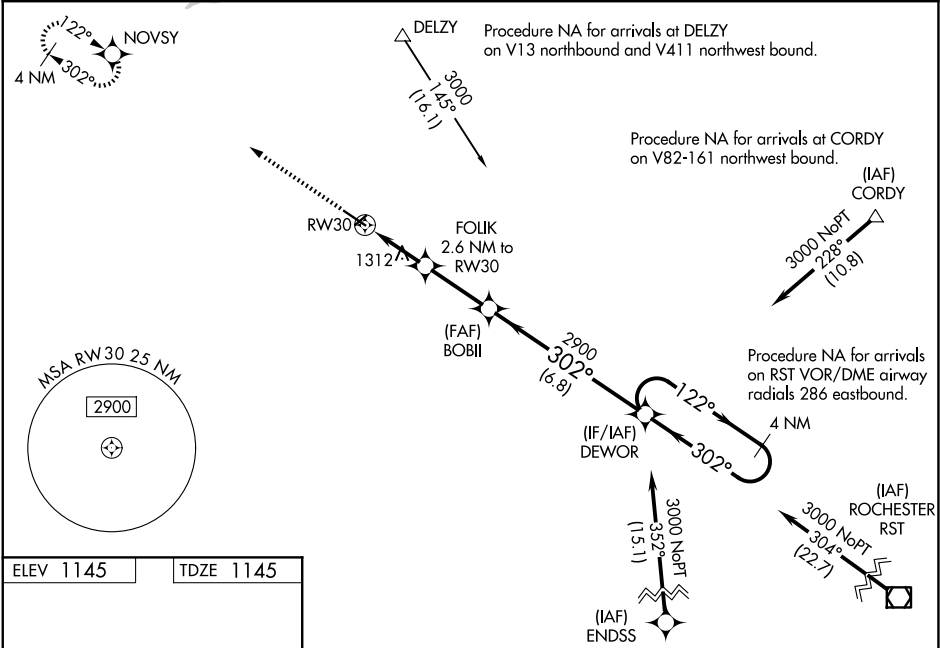

ELEV 1145	TDZE 1145
-----------	-----------

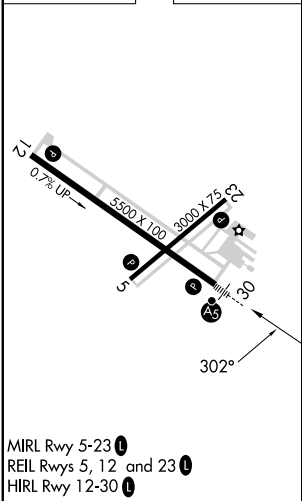

MIRL Rwy 5-23 0
REIL Rwys 5, 12 and 23 0
HIRL Rwy 12-30 0

2800 ↑	NOVSY ✦	DEWOR 4 NM Holding Pattern			
*LNAV only		FOLIK 2.6 NM to RW30	BOBII 2900	122° → ← 302°	3000
1.2 NM to RW30		2020	2900	GP 3.00° TCH 50	
RW30					
-1.2 NM-		-1.4 NM-	-2.8 NM-	-6.8 NM-	
CATEGORY	A		B	C	D
LPV DA	1345-½		200 (200-½)		
LNAV/VNAV DA	1567-1		422 (500-1)		
LNAV MDA	1580-½	435 (500-½)	1580-¾	435 (500-¾)	
CIRCLING	1640-1 495 (500-1)	1700-1 555 (600-1)	1720-1½ 575 (600-1½)	1880-2¼ 735 (800-2¼)	