


WAAS CH 97321 W01A	APP CRS 010°	Rwy Ldg TDZE 626 Apt Elev 638
--	------------------------	---


RNAV (GPS) RWY 1L
TULSA RIVERSIDE (RVS)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct KEVIL and hold.
	Circling NA northeast of Rwy 31 and 19L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TUL altimeter setting. When local altimeter setting not received, use TUL altimeter setting: increase LPV DA to 871 feet; increase LNAV/VNAV DA to 1152 feet and all visibilities 1/2 SM. Increase all MDAs 40 feet and Circling visibility Cat C 1/4 SM.	

ATIS 126.5	TULSA APP CON 134.7	RIVERSIDE TOWER ★ 120.3 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	-------------------------------	---	-------------------------	-------------------------

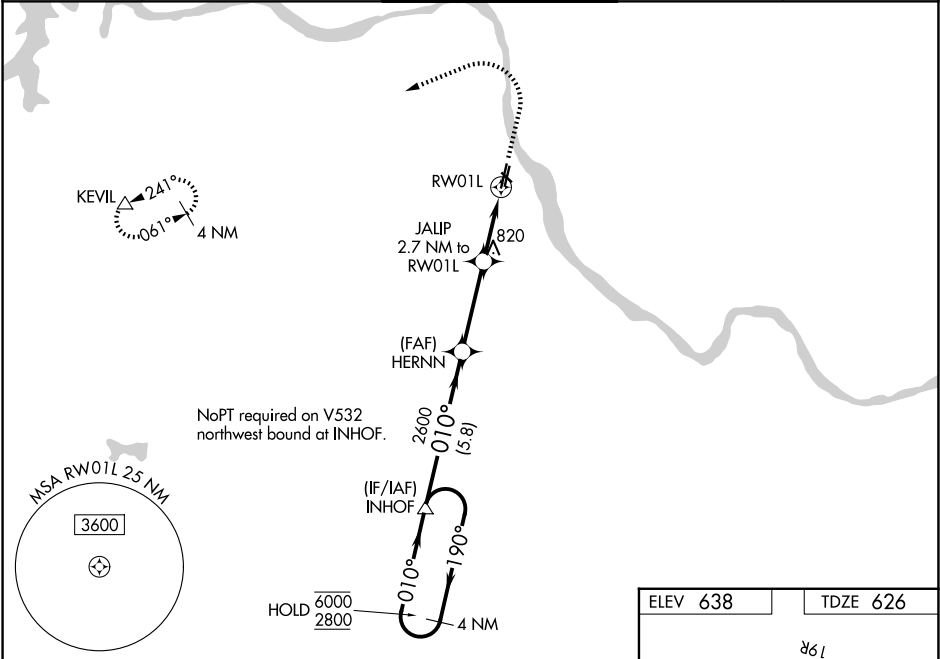

4 NM Holding Pattern		INHOF		1100		2600		KEVIL △	
6000 ← 190° 2800 → 010°		HERNN 2600		JALIP 2.7 NM to RW01L		1.3 NM to RW01L		RW01L	
GP 3.00° TCH 48		2600		1540					
		5.8 NM		3.3 NM		1.5 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV DA				845-¾		219 (300-¾)			
LNAV/ VNAV DA				1126-1⅜		500 (500-1⅜)			
LNAV MDA		1080-1		454 (500-1)		1080-1⅜		454 (500-1⅜)	
CIRCLING		1260-1 622 (700-1)		1280-1 642 (700-1)		1280-1¾ 642 (700-1¾)		1380-2½ 742 (800-2½)	

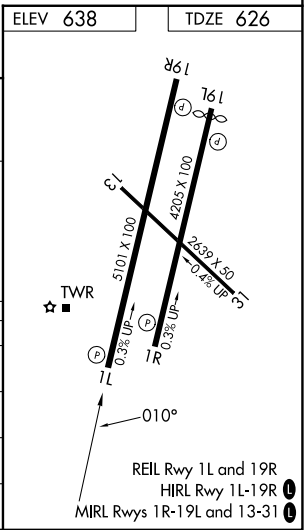

SC-1, 09 JUL 2026 to 06 AUG 2026

SC-1, 09 JUL 2026 to 06 AUG 2026