
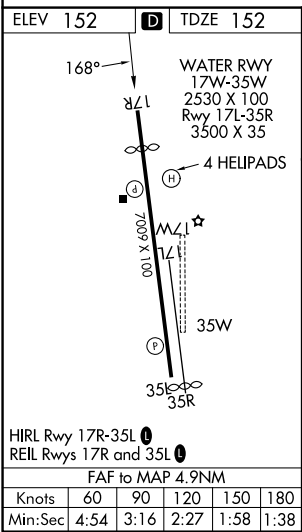


LOC/DME I-HEW 110.5 Chan 42	APP CRS 168°	Rwy Ldg TDZE 152 Apt Elev 152
---	------------------------	---

LOC RWY 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.		MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.
▼ ▲ NA	When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cts C/D visibility ½ mile. Circling NA to Rwy 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.	

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 (E) 118.4 (CTAF) 354.1 (W)	GND CON 121.8 239.0	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	-------------------------

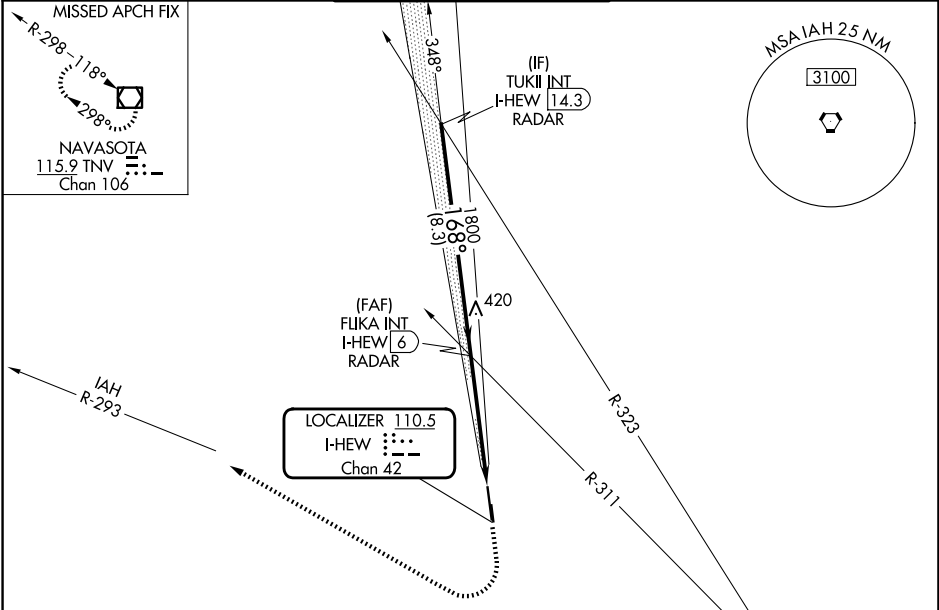

ELEV 152	D	TDZE 152
WATER RWY 17W-35W 2530 X 100 Rwy 17L-35R 3500 X 35		4 HELIPADS
HIRL Rwy 17R-35L REIL Rwy 17R and 35L		FAF to MAP 4.9NM
Knots	60	90 120 150 180
Min:Sec	4:54	3:16 2:27 1:58 1:38

TUKII INT I-HEW 14.3 RADAR		Visual Segment - Obstacles.	1200	2000	IAH R-293	TNV
2000		168°	↑	hdg 325°		
FLIKA INT I-HEW 6 RADAR		1800				
I-HEW 1.1						
8.3 NM		4.9 NM				
CATEGORY	A	B	C	D		
S-LOC 17R	640-1	488 (500-1)	640-1½	488 (500-1½)		
CIRCLING	640-1 488 (500-1)	660-1 508 (600-1)	680-1½ 528 (600-1½)	780-2 628 (700-2)		

SC-5, 09 JUL 2026 to 06 AUG 2026

SC-5, 09 JUL 2026 to 06 AUG 2026