

TOP ALTITUDE:
ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.


(PAVYL3.PAVYL) 26022

PAVYL THREE DEPARTURE (RNAV)

LIVINGSTON COUNTY/SPENCER J HARDY (OZW)
AL-5485 (FAA)
HOWELL, MICHIGAN

AWOS-3P
118.875
CLNC DEL
121.725
CTAF
123.0
DETROIT DEP CON
132.35 284.0

NOTE: Jet departures at /above 10000,
maintain 280K until advised by ATC.

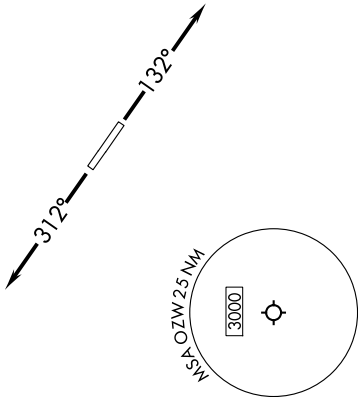

TAKEOFF MINIMUMS:
Rwys 13, 31: Standard.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 13: Climb on heading 132° or as assigned by ATC, thence...
TAKEOFF RUNWAY 31: Climb on heading 312° or as assigned by ATC, thence...

....for RADAR vectors to SLVVA, then on track 097° to PAVYL, then on (transition). Maintain 17000 or as assigned by ATC, expect filed altitude 10 minutes after departure.

ESSBE TRANSITION (PAVYL3 ESSBE):
MRDOC TRANSITION (PAVYL3 MRDOC):

PAVYL THREE DEPARTURE (RNAV)
(PAVYL3.PAVYL) 16MAY24

HOWELL, MICHIGAN
LIVINGSTON COUNTY/SPENCER J HARDY (OZW)